



PUZZLER

Inside the pocket watch is a small disk (called a torsional pendulum) that oscillates back and forth at a very precise rate and controls the watch gears. A grandfather clock keeps accurate time because of its pendulum. The tall wooden case provides the space needed by the long pendulum as it advances the clock gears with each swing. In both of these timepieces, the vibration of a carefully shaped component is critical to accurate operation. What properties of oscillating objects make them so useful in timing devices? (Photograph of pocket watch, George Semple; photograph of grandfather clock, Charles D. Winters)



Oscillatory Motion

chapter

13

Chapter Outline

- 13.1** Simple Harmonic Motion
- 13.2** The Block-Spring System Revisited
- 13.3** Energy of the Simple Harmonic Oscillator
- 13.4** The Pendulum
- 13.5** Comparing Simple Harmonic Motion with Uniform Circular Motion
- 13.6** (Optional) Damped Oscillations
- 13.7** (Optional) Forced Oscillations

A very special kind of motion occurs when the force acting on a body is proportional to the displacement of the body from some equilibrium position. If this force is always directed toward the equilibrium position, repetitive back-and-forth motion occurs about this position. Such motion is called *periodic motion*, *harmonic motion*, *oscillation*, or *vibration* (the four terms are completely equivalent).

You are most likely familiar with several examples of periodic motion, such as the oscillations of a block attached to a spring, the swinging of a child on a playground swing, the motion of a pendulum, and the vibrations of a stringed musical instrument. In addition to these everyday examples, numerous other systems exhibit periodic motion. For example, the molecules in a solid oscillate about their equilibrium positions; electromagnetic waves, such as light waves, radar, and radio waves, are characterized by oscillating electric and magnetic field vectors; and in alternating-current electrical circuits, voltage, current, and electrical charge vary periodically with time.

Most of the material in this chapter deals with *simple harmonic motion*, in which an object oscillates such that its position is specified by a sinusoidal function of time with no loss in mechanical energy. In real mechanical systems, damping (frictional) forces are often present. These forces are considered in optional Section 13.6 at the end of this chapter.

13.1 SIMPLE HARMONIC MOTION

8.10 Consider a physical system that consists of a block of mass m attached to the end of a spring, with the block free to move on a horizontal, frictionless surface (Fig. 13.1). When the spring is neither stretched nor compressed, the block is at the position $x = 0$, called the *equilibrium position* of the system. We know from experience that such a system oscillates back and forth if disturbed from its equilibrium position.

We can understand the motion in Figure 13.1 qualitatively by first recalling that when the block is displaced a small distance x from equilibrium, the spring exerts on the block a force that is proportional to the displacement and given by Hooke's law (see Section 7.3):

$$F_s = -kx \quad (13.1)$$

We call this a **restoring force** because it is always directed toward the equilibrium position and therefore *opposite* the displacement. That is, when the block is displaced to the right of $x = 0$ in Figure 13.1, then the displacement is positive and the restoring force is directed to the left. When the block is displaced to the left of $x = 0$, then the displacement is negative and the restoring force is directed to the right.

Applying Newton's second law to the motion of the block, together with Equation 13.1, we obtain

$$\begin{aligned} F_s = -kx &= ma \\ a &= -\frac{k}{m}x \end{aligned} \quad (13.2)$$

That is, the acceleration is proportional to the displacement of the block, and its direction is opposite the direction of the displacement. Systems that behave in this way are said to exhibit **simple harmonic motion**. **An object moves with simple harmonic motion whenever its acceleration is proportional to its displacement from some equilibrium position and is oppositely directed.**

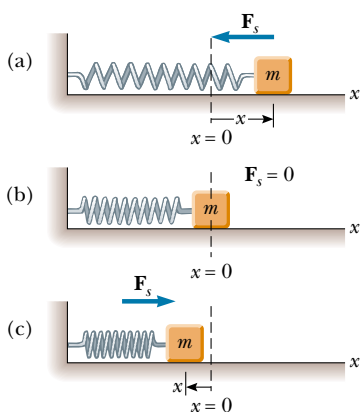


Figure 13.1 A block attached to a spring moving on a frictionless surface. (a) When the block is displaced to the right of equilibrium ($x > 0$), the force exerted by the spring acts to the left. (b) When the block is at its equilibrium position ($x = 0$), the force exerted by the spring is zero. (c) When the block is displaced to the left of equilibrium ($x < 0$), the force exerted by the spring acts to the right.


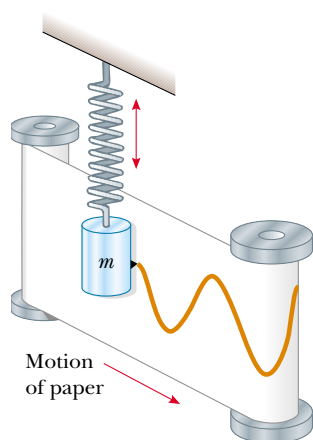


Figure 13.2 An experimental apparatus for demonstrating simple harmonic motion. A pen attached to the oscillating mass traces out a wavelike pattern on the moving chart paper.

An experimental arrangement that exhibits simple harmonic motion is illustrated in Figure 13.2. A mass oscillating vertically on a spring has a pen attached to it. While the mass is oscillating, a sheet of paper is moved perpendicular to the direction of motion of the spring, and the pen traces out a wavelike pattern.



In general, a particle moving along the x axis exhibits simple harmonic motion when x , the particle's displacement from equilibrium, varies in time according to the relationship

$$x = A \cos(\omega t + \phi) \quad (13.3)$$

where A , ω , and ϕ are constants. To give physical significance to these constants, we have labeled a plot of x as a function of t in Figure 13.3a. This is just the pattern that is observed with the experimental apparatus shown in Figure 13.2. The **amplitude** A of the motion is the maximum displacement of the particle in either the positive or negative x direction. The constant ω is called the **angular frequency** of the motion and has units of radians per second. (We shall discuss the geometric significance of ω in Section 13.2.) The constant angle ϕ , called the **phase constant** (or phase angle), is determined by the initial displacement and velocity of the particle. If the particle is at its maximum position $x = A$ at $t = 0$, then $\phi = 0$ and the curve of x versus t is as shown in Figure 13.3b. If the particle is at some other position at $t = 0$, the constants ϕ and A tell us what the position was at time $t = 0$. The quantity $(\omega t + \phi)$ is called the **phase** of the motion and is useful in comparing the motions of two oscillators.

Note from Equation 13.3 that the trigonometric function x is *periodic* and repeats itself every time ωt increases by 2π rad. **The period T of the motion is the time it takes for the particle to go through one full cycle.** We say that the particle has made *one oscillation*. This definition of T tells us that the value of x at time t equals the value of x at time $t + T$. We can show that $T = 2\pi/\omega$ by using the preceding observation that the phase $(\omega t + \phi)$ increases by 2π rad in a time T :

$$\omega t + \phi + 2\pi = \omega(t + T) + \phi$$

Hence, $\omega T = 2\pi$, or

$$T = \frac{2\pi}{\omega} \quad (13.4)$$

Displacement versus time for simple harmonic motion

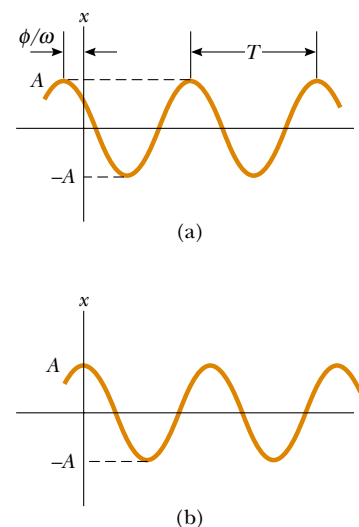


Figure 13.3 (a) An $x-t$ curve for a particle undergoing simple harmonic motion. The amplitude of the motion is A , the period is T , and the phase constant is ϕ . (b) The $x-t$ curve in the special case in which $x = A$ at $t = 0$ and hence $\phi = 0$.

The inverse of the period is called the **frequency** f of the motion. **The frequency represents the number of oscillations that the particle makes per unit time:**

Frequency

$$f = \frac{1}{T} = \frac{\omega}{2\pi} \quad (13.5)$$

The units of f are cycles per second = s^{-1} , or **hertz** (Hz).

Rearranging Equation 13.5, we obtain the angular frequency:

Angular frequency

$$\omega = 2\pi f = \frac{2\pi}{T} \quad (13.6)$$

Quick Quiz 13.1

What would the phase constant ϕ have to be in Equation 13.3 if we were describing an oscillating object that happened to be at the origin at $t = 0$?

Quick Quiz 13.2

An object undergoes simple harmonic motion of amplitude A . Through what total distance does the object move during one complete cycle of its motion? (a) $A/2$. (b) A . (c) $2A$. (d) $4A$.

We can obtain the linear velocity of a particle undergoing simple harmonic motion by differentiating Equation 13.3 with respect to time:

Velocity in simple harmonic motion

$$v = \frac{dx}{dt} = -\omega A \sin(\omega t + \phi) \quad (13.7)$$

The acceleration of the particle is

Acceleration in simple harmonic motion

$$a = \frac{dv}{dt} = -\omega^2 A \cos(\omega t + \phi) \quad (13.8)$$

Because $x = A \cos(\omega t + \phi)$, we can express Equation 13.8 in the form

$$a = -\omega^2 x \quad (13.9)$$

From Equation 13.7 we see that, because the sine function oscillates between ± 1 , the extreme values of v are $\pm \omega A$. Because the cosine function also oscillates between ± 1 , Equation 13.8 tells us that the extreme values of a are $\pm \omega^2 A$. Therefore, the maximum speed and the magnitude of the maximum acceleration of a particle moving in simple harmonic motion are

Maximum values of speed and acceleration in simple harmonic motion

$$v_{\max} = \omega A \quad (13.10)$$

$$a_{\max} = \omega^2 A \quad (13.11)$$

Figure 13.4a represents the displacement versus time for an arbitrary value of the phase constant. The velocity and acceleration curves are illustrated in Figure 13.4b and c. These curves show that the phase of the velocity differs from the phase of the displacement by $\pi/2$ rad, or 90° . That is, when x is a maximum or a minimum, the velocity is zero. Likewise, when x is zero, the speed is a maximum.

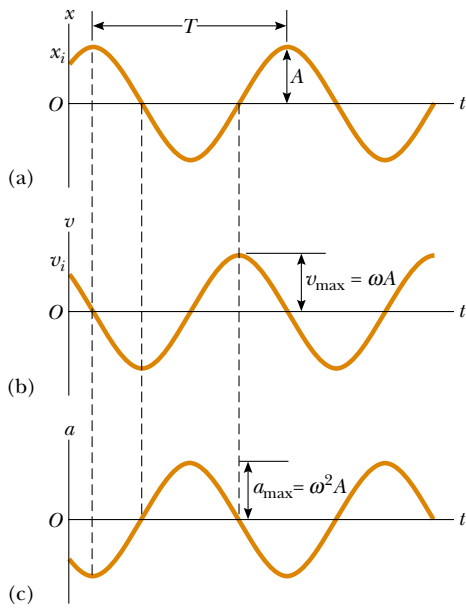


Figure 13.4 Graphical representation of simple harmonic motion. (a) Displacement versus time. (b) Velocity versus time. (c) Acceleration versus time. Note that at any specified time the velocity is 90° out of phase with the displacement and the acceleration is 180° out of phase with the displacement.

Furthermore, note that the phase of the acceleration differs from the phase of the displacement by π rad, or 180° . That is, when x is a maximum, a is a maximum in the opposite direction.

The phase constant ϕ is important when we compare the motion of two or more oscillating objects. Imagine two identical pendulum bobs swinging side by side in simple harmonic motion, with one having been released later than the other. The pendulum bobs have different phase constants. Let us show how the phase constant and the amplitude of any particle moving in simple harmonic motion can be determined if we know the particle's initial speed and position and the angular frequency of its motion.

Suppose that at $t = 0$ the initial position of a single oscillator is $x = x_i$ and its initial speed is $v = v_i$. Under these conditions, Equations 13.3 and 13.7 give

$$x_i = A \cos \phi \quad (13.12)$$

$$v_i = -\omega A \sin \phi \quad (13.13)$$

Dividing Equation 13.13 by Equation 13.12 eliminates A , giving $v_i/x_i = -\omega \tan \phi$, or

$$\tan \phi = -\frac{v_i}{\omega x_i} \quad (13.14)$$

Furthermore, if we square Equations 13.12 and 13.13, divide the velocity equation by ω^2 , and then add terms, we obtain

$$x_i^2 + \left(\frac{v_i}{\omega}\right)^2 = A^2 \cos^2 \phi + A^2 \sin^2 \phi$$

Using the identity $\sin^2 \phi + \cos^2 \phi = 1$, we can solve for A :

$$A = \sqrt{x_i^2 + \left(\frac{v_i}{\omega}\right)^2} \quad (13.15)$$

The following properties of a particle moving in simple harmonic motion are important:

Properties of simple harmonic motion

- The acceleration of the particle is proportional to the displacement but is in the opposite direction. This is the *necessary and sufficient condition for simple harmonic motion*, as opposed to all other kinds of vibration.
- The displacement from the equilibrium position, velocity, and acceleration all vary sinusoidally with time but are not in phase, as shown in Figure 13.4.
- The frequency and the period of the motion are independent of the amplitude. (We show this explicitly in the next section.)

Quick Quiz 13.3

Can we use Equations 2.8, 2.10, 2.11, and 2.12 (see pages 35 and 36) to describe the motion of a simple harmonic oscillator?

EXAMPLE 13.1 An Oscillating Object

An object oscillates with simple harmonic motion along the x axis. Its displacement from the origin varies with time according to the equation

$$x = (4.00 \text{ m}) \cos\left(\pi t + \frac{\pi}{4}\right)$$

where t is in seconds and the angles in the parentheses are in radians. (a) Determine the amplitude, frequency, and period of the motion.

Solution By comparing this equation with Equation 13.3, the general equation for simple harmonic motion— $x = A \cos(\omega t + \phi)$ —we see that $A = 4.00 \text{ m}$ and $\omega = \pi \text{ rad/s}$. Therefore, $f = \omega/2\pi = \pi/2\pi = 0.500 \text{ Hz}$ and $T = 1/f = 2.00 \text{ s}$.

(b) Calculate the velocity and acceleration of the object at any time t .

Solution

$$\begin{aligned} v &= \frac{dx}{dt} = -(4.00 \text{ m}) \sin\left(\pi t + \frac{\pi}{4}\right) \frac{d}{dt}(\pi t) \\ &= -(4.00\pi \text{ m/s}) \sin\left(\pi t + \frac{\pi}{4}\right) \end{aligned}$$

$$\begin{aligned} a &= \frac{dv}{dt} = -(4.00\pi \text{ m/s}) \cos\left(\pi t + \frac{\pi}{4}\right) \frac{d}{dt}(\pi t) \\ &= -(4.00\pi^2 \text{ m/s}^2) \cos\left(\pi t + \frac{\pi}{4}\right) \end{aligned}$$

(c) Using the results of part (b), determine the position, velocity, and acceleration of the object at $t = 1.00 \text{ s}$.

Solution Noting that the angles in the trigonometric functions are in radians, we obtain, at $t = 1.00 \text{ s}$,

$$\begin{aligned} x &= (4.00 \text{ m}) \cos\left(\pi + \frac{\pi}{4}\right) = (4.00 \text{ m}) \cos\left(\frac{5\pi}{4}\right) \\ &= (4.00 \text{ m})(-0.707) = -2.83 \text{ m} \end{aligned}$$

$$\begin{aligned} v &= -(4.00\pi \text{ m/s}) \sin\left(\frac{5\pi}{4}\right) = -(4.00\pi \text{ m/s})(-0.707) \\ &= 8.89 \text{ m/s} \end{aligned}$$

$$\begin{aligned} a &= -(4.00\pi^2 \text{ m/s}^2) \cos\left(\frac{5\pi}{4}\right) \\ &= -(4.00\pi^2 \text{ m/s}^2)(-0.707) = 27.9 \text{ m/s}^2 \end{aligned}$$

(d) Determine the maximum speed and maximum acceleration of the object.

Solution In the general expressions for v and a found in part (b), we use the fact that the maximum values of the sine and cosine functions are unity. Therefore, v varies between $\pm 4.00\pi \text{ m/s}$, and a varies between $\pm 4.00\pi^2 \text{ m/s}^2$. Thus,

$$v_{\max} = 4.00\pi \text{ m/s} = 12.6 \text{ m/s}$$

$$a_{\max} = 4.00\pi^2 \text{ m/s}^2 = 39.5 \text{ m/s}^2$$

We obtain the same results using $v_{\max} = \omega A$ and $a_{\max} = \omega^2 A$, where $A = 4.00 \text{ m}$ and $\omega = \pi \text{ rad/s}$.

(e) Find the displacement of the object between $t = 0$ and $t = 1.00 \text{ s}$.

Solution The x coordinate at $t = 0$ is

$$x_i = (4.00 \text{ m}) \cos\left(0 + \frac{\pi}{4}\right) = (4.00 \text{ m})(0.707) = 2.83 \text{ m}$$

In part (c), we found that the x coordinate at $t = 1.00$ s is -2.83 m; therefore, the displacement between $t = 0$ and $t = 1.00$ s is

$$\Delta x = x_f - x_i = -2.83 \text{ m} - 2.83 \text{ m} = -5.66 \text{ m}$$

Because the object's velocity changes sign during the first second, the magnitude of Δx is not the same as the distance traveled in the first second. (By the time the first second is over, the object has been through the point $x = -2.83$ m once, traveled to $x = -4.00$ m, and come back to $x = -2.83$ m.)

Exercise What is the phase of the motion at $t = 2.00$ s?

Answer $9\pi/4$ rad.

13.2 THE BLOCK–SPRING SYSTEM REVISITED

Let us return to the block–spring system (Fig. 13.5). Again we assume that the surface is frictionless; hence, when the block is displaced from equilibrium, the only force acting on it is the restoring force of the spring. As we saw in Equation 13.2, when the block is displaced a distance x from equilibrium, it experiences an acceleration $a = -(k/m)x$. If the block is displaced a maximum distance $x = A$ at some initial time and then released from rest, its initial acceleration at that instant is $-kA/m$ (its extreme negative value). When the block passes through the equilibrium position $x = 0$, its acceleration is zero. At this instant, its speed is a maximum. The block then continues to travel to the left of equilibrium and finally reaches $x = -A$, at which time its acceleration is kA/m (maximum positive) and its speed is again zero. Thus, we see that the block oscillates between the turning points $x = \pm A$.

Let us now describe the oscillating motion in a quantitative fashion. Recall that $a = dv/dt = d^2x/dt^2$, and so we can express Equation 13.2 as

$$\frac{d^2x}{dt^2} = -\frac{k}{m}x \quad (13.16)$$

If we denote the ratio k/m with the symbol ω^2 , this equation becomes

$$\frac{d^2x}{dt^2} = -\omega^2x \quad (13.17)$$

Now we require a solution to Equation 13.17—that is, a function $x(t)$ that satisfies this second-order differential equation. Because Equations 13.17 and 13.9 are equivalent, each solution must be that of simple harmonic motion:

$$x = A \cos(\omega t + \phi)$$

To see this explicitly, assume that $x = A \cos(\omega t + \phi)$. Then

$$\frac{dx}{dt} = A \frac{d}{dt} \cos(\omega t + \phi) = -\omega A \sin(\omega t + \phi)$$

$$\frac{d^2x}{dt^2} = -\omega A \frac{d}{dt} \sin(\omega t + \phi) = -\omega^2 A \cos(\omega t + \phi)$$

Comparing the expressions for x and d^2x/dt^2 , we see that $d^2x/dt^2 = -\omega^2x$, and Equation 13.17 is satisfied. We conclude that **whenever the force acting on a particle is linearly proportional to the displacement from some equilibrium**

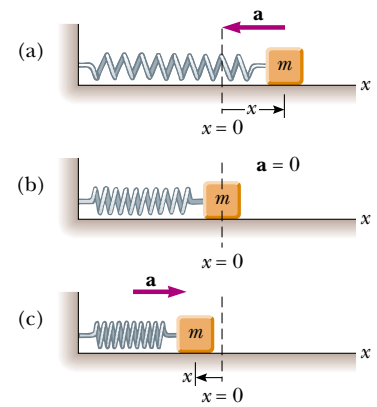


Figure 13.5 A block of mass m attached to a spring on a frictionless surface undergoes simple harmonic motion. (a) When the block is displaced to the right of equilibrium, the displacement is positive and the acceleration is negative. (b) At the equilibrium position, $x = 0$, the acceleration is zero and the speed is a maximum. (c) When the block is displaced to the left of equilibrium, the displacement is negative and the acceleration is positive.

position and in the opposite direction ($F = -kx$), the particle moves in simple harmonic motion.

Recall that the period of any simple harmonic oscillator is $T = 2\pi/\omega$ (Eq. 13.4) and that the frequency is the inverse of the period. We know from Equations 13.16 and 13.17 that $\omega = \sqrt{k/m}$, so we can express the period and frequency of the block–spring system as

Period and frequency for a block–spring system

$$T = \frac{2\pi}{\omega} = 2\pi \sqrt{\frac{m}{k}} \quad (13.18)$$

$$f = \frac{1}{T} = \frac{1}{2\pi} \sqrt{\frac{k}{m}} \quad (13.19)$$

That is, **the frequency and period depend only on the mass of the block and on the force constant of the spring.** Furthermore, the frequency and period are independent of the amplitude of the motion. As we might expect, the frequency is greater for a stiffer spring (the stiffer the spring, the greater the value of k) and decreases with increasing mass.

QuickLab

Hang an object from a rubber band and start it oscillating. Measure T . Now tie four identical rubber bands together, end to end. How should k for this longer band compare with k for the single band? Again, time the oscillations with the same object. Can you verify Equation 13.19?



Special Case 1. Let us consider a special case to better understand the physical significance of Equation 13.3, the defining expression for simple harmonic motion. We shall use this equation to describe the motion of an oscillating block–spring system. Suppose we pull the block a distance A from equilibrium and then release it from rest at this stretched position, as shown in Figure 13.6. Our solution for x must obey the initial conditions that $x_i = A$ and $v_i = 0$ at $t = 0$. It does if we choose $\phi = 0$, which gives $x = A \cos \omega t$ as the solution. To check this solution, we note that it satisfies the condition that $x_i = A$ at $t = 0$ because $\cos 0 = 1$. Thus, we see that A and ϕ contain the information on initial conditions.

Now let us investigate the behavior of the velocity and acceleration for this special case. Because $x = A \cos \omega t$,

$$v = \frac{dx}{dt} = -\omega A \sin \omega t$$

$$a = \frac{dv}{dt} = -\omega^2 A \cos \omega t$$

From the velocity expression we see that, because $\sin 0 = 0$, $v_i = 0$ at $t = 0$, as we require. The expression for the acceleration tells us that $a = -\omega^2 A$ at $t = 0$. Physically, this negative acceleration makes sense because the force acting on the block is directed to the left when the displacement is positive. In fact, at the extreme po-

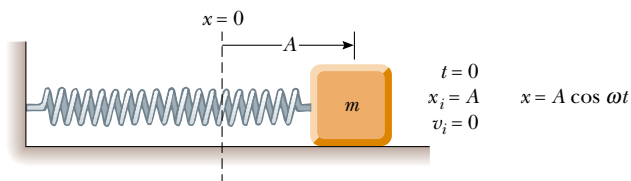


Figure 13.6 A block–spring system that starts from rest at $x_i = A$. In this case, $\phi = 0$ and thus $x = A \cos \omega t$.

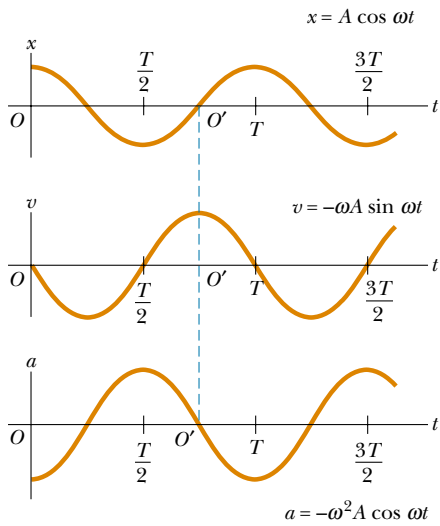


Figure 13.7 Displacement, velocity, and acceleration versus time for a block–spring system like the one shown in Figure 13.6, undergoing simple harmonic motion under the initial conditions that at $t = 0$, $x_i = A$ and $v_i = 0$ (Special Case 1). The origins at O' correspond to Special Case 2, the block–spring system under the initial conditions shown in Figure 13.8.

sition shown in Figure 13.6, $F_s = -kA$ (to the left) and the initial acceleration is $-\omega^2 A = -kA/m$.

Another approach to showing that $x = A \cos \omega t$ is the correct solution involves using the relationship $\tan \phi = -v_i/\omega x_i$ (Eq. 13.14). Because $v_i = 0$ at $t = 0$, $\tan \phi = 0$ and thus $\phi = 0$. (The tangent of π also equals zero, but $\phi = \pi$ gives the wrong value for x_i .)

Figure 13.7 is a plot of displacement, velocity, and acceleration versus time for this special case. Note that the acceleration reaches extreme values of $\pm \omega^2 A$ while the displacement has extreme values of $\pm A$ because the force is maximal at those positions. Furthermore, the velocity has extreme values of $\pm \omega A$, which both occur at $x = 0$. Hence, the quantitative solution agrees with our qualitative description of this system.

Special Case 2. Now suppose that the block is given an initial velocity \mathbf{v}_i to the right at the instant it is at the equilibrium position, so that $x_i = 0$ and $v = v_i$ at $t = 0$ (Fig. 13.8). The expression for x must now satisfy these initial conditions. Because the block is moving in the positive x direction at $t = 0$ and because $x_i = 0$ at $t = 0$, the expression for x must have the form $x = A \sin \omega t$.

Applying Equation 13.14 and the initial condition that $x_i = 0$ at $t = 0$, we find that $\tan \phi = -\infty$ and $\phi = -\pi/2$. Hence, Equation 13.3 becomes $x = A \cos(\omega t - \pi/2)$, which can be written $x = A \sin \omega t$. Furthermore, from Equation 13.15 we see that $A = v_i/\omega$; therefore, we can express x as

$$x = \frac{v_i}{\omega} \sin \omega t$$

The velocity and acceleration in this case are

$$v = \frac{dx}{dt} = v_i \cos \omega t$$

$$a = \frac{dv}{dt} = -\omega v_i \sin \omega t$$

These results are consistent with the facts that (1) the block always has a maximum

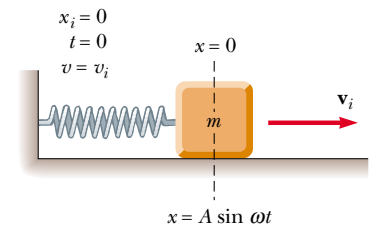


Figure 13.8 The block–spring system starts its motion at the equilibrium position at $t = 0$. If its initial velocity is v_i to the right, the block's x coordinate varies as $x = (v_i/\omega) \sin \omega t$.

speed at $x = 0$ and (2) the force and acceleration are zero at this position. The graphs of these functions versus time in Figure 13.7 correspond to the origin at O' .

Quick Quiz 13.4

What is the solution for x if the block is initially moving to the left in Figure 13.8?

EXAMPLE 13.2 Watch Out for Potholes!

A car with a mass of 1 300 kg is constructed so that its frame is supported by four springs. Each spring has a force constant of 20 000 N/m. If two people riding in the car have a combined mass of 160 kg, find the frequency of vibration of the car after it is driven over a pothole in the road.

Solution We assume that the mass is evenly distributed. Thus, each spring supports one fourth of the load. The total mass is 1 460 kg, and therefore each spring supports 365 kg.

Hence, the frequency of vibration is, from Equation 13.19,

$$f = \frac{1}{2\pi} \sqrt{\frac{k}{m}} = \frac{1}{2\pi} \sqrt{\frac{20\,000 \text{ N/m}}{365 \text{ kg}}} = 1.18 \text{ Hz}$$

Exercise How long does it take the car to execute two complete vibrations?

Answer 1.70 s.

EXAMPLE 13.3 A Block–Spring System

A block with a mass of 200 g is connected to a light spring for which the force constant is 5.00 N/m and is free to oscillate on a horizontal, frictionless surface. The block is displaced 5.00 cm from equilibrium and released from rest, as shown in Figure 13.6. (a) Find the period of its motion.

Solution From Equations 13.16 and 13.17, we know that the angular frequency of any block–spring system is

$$\omega = \sqrt{\frac{k}{m}} = \sqrt{\frac{5.00 \text{ N/m}}{200 \times 10^{-3} \text{ kg}}} = 5.00 \text{ rad/s}$$

and the period is

$$T = \frac{2\pi}{\omega} = \frac{2\pi}{5.00 \text{ rad/s}} = 1.26 \text{ s}$$

(b) Determine the maximum speed of the block.

Solution We use Equation 13.10:

$$v_{\text{max}} = \omega A = (5.00 \text{ rad/s})(5.00 \times 10^{-2} \text{ m}) = 0.250 \text{ m/s}$$

(c) What is the maximum acceleration of the block?

Solution We use Equation 13.11:

$$a_{\text{max}} = \omega^2 A = (5.00 \text{ rad/s})^2 (5.00 \times 10^{-2} \text{ m}) = 1.25 \text{ m/s}^2$$

(d) Express the displacement, speed, and acceleration as functions of time.

Solution This situation corresponds to Special Case 1, where our solution is $x = A \cos \omega t$. Using this expression and the results from (a), (b), and (c), we find that

$$x = A \cos \omega t = (0.050 \text{ m}) \cos 5.00t$$

$$v = \omega A \sin \omega t = -(0.250 \text{ m/s}) \sin 5.00t$$

$$a = \omega^2 A \cos \omega t = -(1.25 \text{ m/s}^2) \cos 5.00t$$

13.3 ENERGY OF THE SIMPLE HARMONIC OSCILLATOR

Let us examine the mechanical energy of the block–spring system illustrated in Figure 13.6. Because the surface is frictionless, we expect the total mechanical energy to be constant, as was shown in Chapter 8. We can use Equation 13.7 to ex-

press the kinetic energy as

$$K = \frac{1}{2} mv^2 = \frac{1}{2} m\omega^2 A^2 \sin^2(\omega t + \phi) \quad (13.20)$$

Kinetic energy of a simple harmonic oscillator

The elastic potential energy stored in the spring for any elongation x is given by $\frac{1}{2} kx^2$ (see Eq. 8.4). Using Equation 13.3, we obtain

$$U = \frac{1}{2} kx^2 = \frac{1}{2} kA^2 \cos^2(\omega t + \phi) \quad (13.21)$$

Potential energy of a simple harmonic oscillator

We see that K and U are *always* positive quantities. Because $\omega^2 = k/m$, we can express the total mechanical energy of the simple harmonic oscillator as

$$E = K + U = \frac{1}{2} kA^2 [\sin^2(\omega t + \phi) + \cos^2(\omega t + \phi)]$$

From the identity $\sin^2 \theta + \cos^2 \theta = 1$, we see that the quantity in square brackets is unity. Therefore, this equation reduces to

$$E = \frac{1}{2} kA^2 \quad (13.22)$$

Total energy of a simple harmonic oscillator

That is, **the total mechanical energy of a simple harmonic oscillator is a constant of the motion and is proportional to the square of the amplitude.** Note that U is small when K is large, and vice versa, because the sum must be constant. In fact, the total mechanical energy is equal to the maximum potential energy stored in the spring when $x = \pm A$ because $v = 0$ at these points and thus there is no kinetic energy. At the equilibrium position, where $U = 0$ because $x = 0$, the total energy, all in the form of kinetic energy, is again $\frac{1}{2} kA^2$. That is,

$$E = \frac{1}{2} mv_{\max}^2 = \frac{1}{2} m\omega^2 A^2 = \frac{1}{2} m \frac{k}{m} A^2 = \frac{1}{2} kA^2 \quad (\text{at } x = 0)$$

Plots of the kinetic and potential energies versus time appear in Figure 13.9a, where we have taken $\phi = 0$. As already mentioned, both K and U are always positive, and at all times their sum is a constant equal to $\frac{1}{2} kA^2$, the total energy of the system. The variations of K and U with the displacement x of the block are plotted

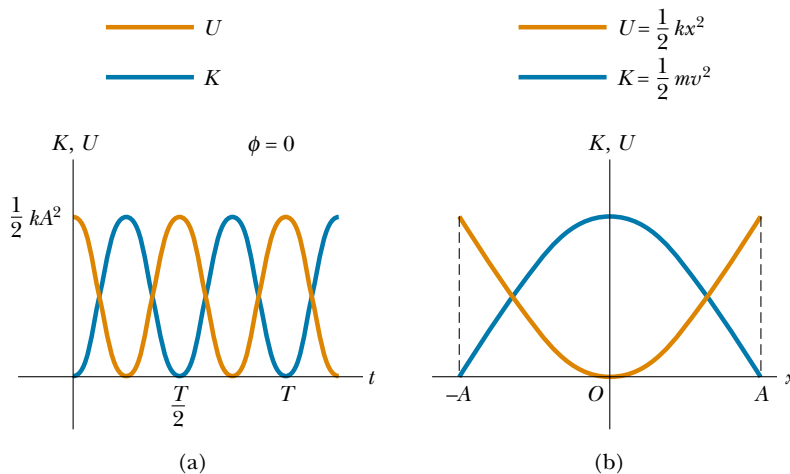


Figure 13.9 (a) Kinetic energy and potential energy versus time for a simple harmonic oscillator with $\phi = 0$. (b) Kinetic energy and potential energy versus displacement for a simple harmonic oscillator. In either plot, note that $K + U = \text{constant}$.

in Figure 13.9b. Energy is continuously being transformed between potential energy stored in the spring and kinetic energy of the block.

Figure 13.10 illustrates the position, velocity, acceleration, kinetic energy, and potential energy of the block–spring system for one full period of the motion. Most of the ideas discussed so far are incorporated in this important figure. Study it carefully.

Finally, we can use the principle of conservation of energy to obtain the velocity for an arbitrary displacement by expressing the total energy at some arbitrary position x as

$$E = K + U = \frac{1}{2}mv^2 + \frac{1}{2}kx^2 = \frac{1}{2}kA^2$$

$$v = \pm \sqrt{\frac{k}{m}(A^2 - x^2)} = \pm \omega\sqrt{A^2 - x^2} \tag{13.23}$$

Velocity as a function of position for a simple harmonic oscillator

When we check Equation 13.23 to see whether it agrees with known cases, we find that it substantiates the fact that the speed is a maximum at $x = 0$ and is zero at the turning points $x = \pm A$.

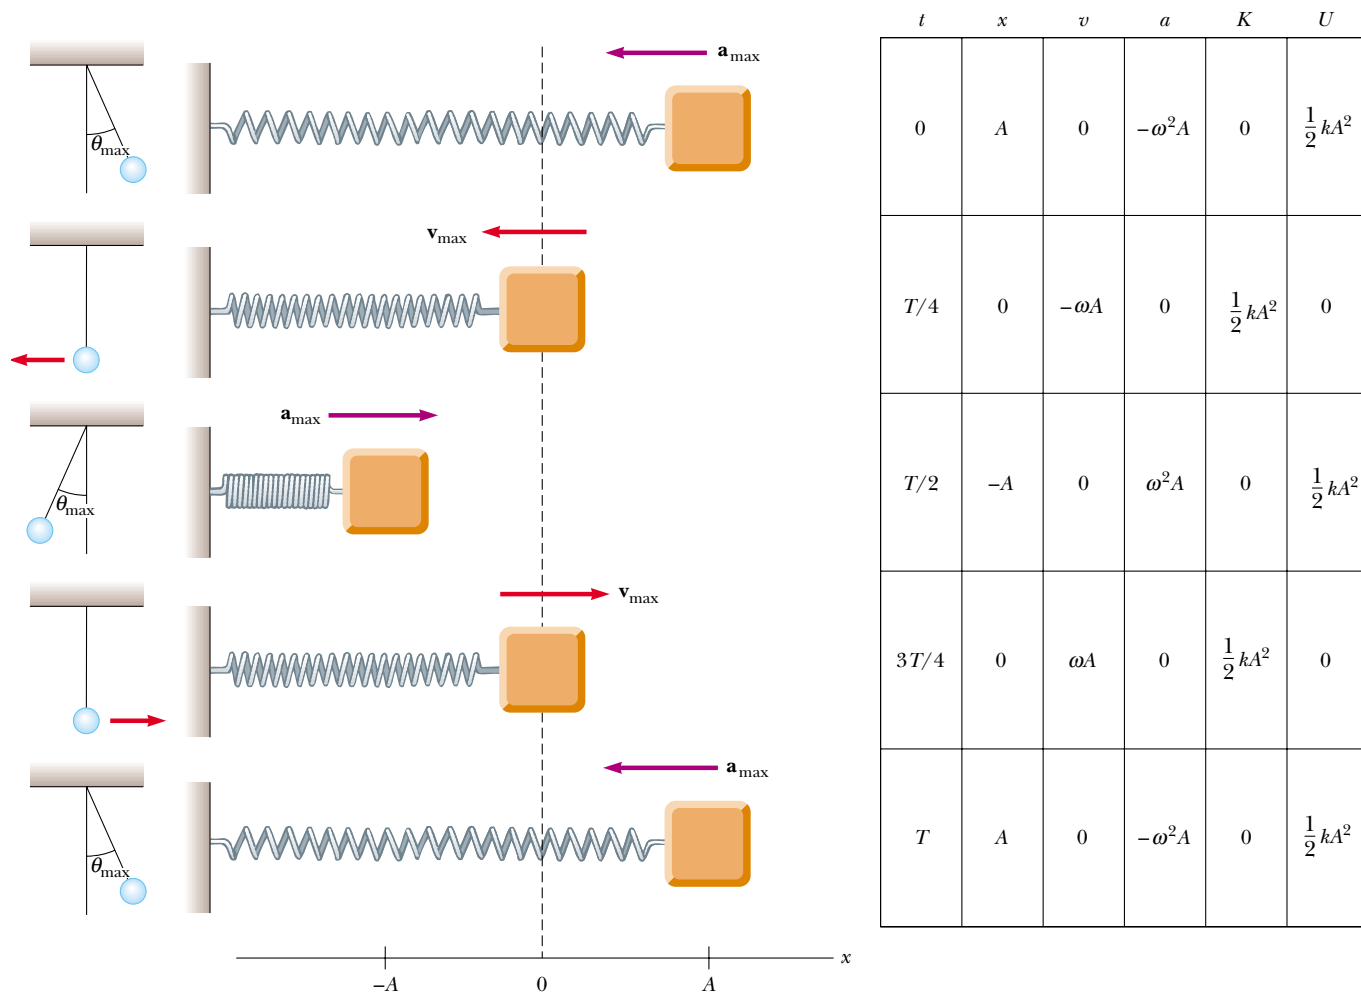


Figure 13.10 Simple harmonic motion for a block–spring system and its relationship to the motion of a simple pendulum. The parameters in the table refer to the block–spring system, assuming that $x = A$ at $t = 0$; thus, $x = A \cos \omega t$ (see Special Case 1).

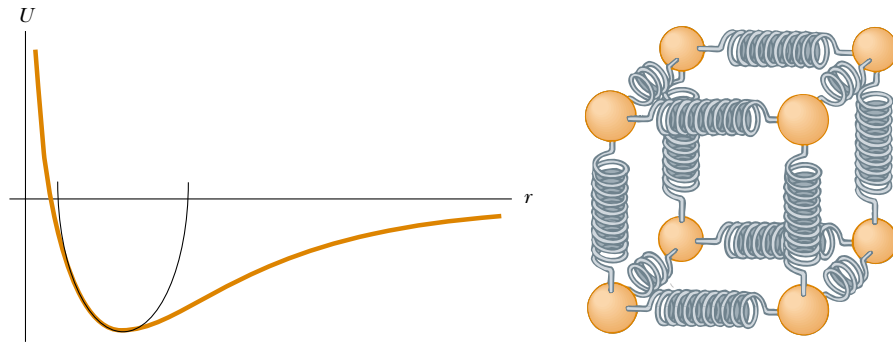


Figure 13.11 (a) If the atoms in a molecule do not move too far from their equilibrium positions, a graph of potential energy versus separation distance between atoms is similar to the graph of potential energy versus position for a simple harmonic oscillator. (b) Tiny springs approximate the forces holding atoms together.

You may wonder why we are spending so much time studying simple harmonic oscillators. We do so because they are good models of a wide variety of physical phenomena. For example, recall the Lennard–Jones potential discussed in Example 8.11. This complicated function describes the forces holding atoms together. Figure 13.11a shows that, for small displacements from the equilibrium position, the potential energy curve for this function approximates a parabola, which represents the potential energy function for a simple harmonic oscillator. Thus, we can approximate the complex atomic binding forces as tiny springs, as depicted in Figure 13.11b.

The ideas presented in this chapter apply not only to block–spring systems and atoms, but also to a wide range of situations that include bungee jumping, tuning in a television station, and viewing the light emitted by a laser. You will see more examples of simple harmonic oscillators as you work through this book.



EXAMPLE 13.4 Oscillations on a Horizontal Surface

A 0.500-kg cube connected to a light spring for which the force constant is 20.0 N/m oscillates on a horizontal, frictionless track. (a) Calculate the total energy of the system and the maximum speed of the cube if the amplitude of the motion is 3.00 cm.

Solution Using Equation 13.22, we obtain

$$\begin{aligned} E = K + U &= \frac{1}{2} kA^2 = \frac{1}{2} (20.0 \text{ N/m}) (3.00 \times 10^{-2} \text{ m})^2 \\ &= 9.00 \times 10^{-3} \text{ J} \end{aligned}$$

When the cube is at $x = 0$, we know that $U = 0$ and $E = \frac{1}{2} mv_{\text{max}}^2$; therefore,

$$\begin{aligned} \frac{1}{2} mv_{\text{max}}^2 &= 9.00 \times 10^{-3} \text{ J} \\ v_{\text{max}} &= \sqrt{\frac{18.0 \times 10^{-3} \text{ J}}{0.500 \text{ kg}}} = 0.190 \text{ m/s} \end{aligned}$$

(b) What is the velocity of the cube when the displacement is 2.00 cm?

Solution We can apply Equation 13.23 directly:

$$\begin{aligned} v &= \pm \sqrt{\frac{k}{m} (A^2 - x^2)} \\ &= \pm \sqrt{\frac{20.0 \text{ N/m}}{0.500 \text{ kg}} [(0.0300 \text{ m})^2 - (0.0200 \text{ m})^2]} \\ &= \pm 0.141 \text{ m/s} \end{aligned}$$

The positive and negative signs indicate that the cube could be moving to either the right or the left at this instant.

(c) Compute the kinetic and potential energies of the system when the displacement is 2.00 cm.

Solution Using the result of (b), we find that

$$K = \frac{1}{2} mv^2 = \frac{1}{2} (0.500 \text{ kg})(0.141 \text{ m/s})^2 = 5.00 \times 10^{-3} \text{ J}$$

$$U = \frac{1}{2} kx^2 = \frac{1}{2} (20.0 \text{ N/m})(0.0200 \text{ m})^2 = 4.00 \times 10^{-3} \text{ J}$$

Note that $K + U = E$.

Exercise For what values of x is the speed of the cube 0.100 m/s ?

Answer $\pm 2.55 \text{ cm}$.

13.4 THE PENDULUM

8.11
&
8.12

The **simple pendulum** is another mechanical system that exhibits periodic motion. It consists of a particle-like bob of mass m suspended by a light string of length L that is fixed at the upper end, as shown in Figure 13.12. The motion occurs in the vertical plane and is driven by the force of gravity. We shall show that, provided the angle θ is small (less than about 10°), the motion is that of a simple harmonic oscillator.

The forces acting on the bob are the force \mathbf{T} exerted by the string and the gravitational force $m\mathbf{g}$. The tangential component of the gravitational force, $mg \sin \theta$, always acts toward $\theta = 0$, opposite the displacement. Therefore, the tangential force is a restoring force, and we can apply Newton's second law for motion in the tangential direction:

$$\sum F_t = -mg \sin \theta = m \frac{d^2 s}{dt^2}$$

where s is the bob's displacement measured along the arc and the minus sign indicates that the tangential force acts toward the equilibrium (vertical) position. Because $s = L\theta$ (Eq. 10.1a) and L is constant, this equation reduces to

$$\frac{d^2 \theta}{dt^2} = -\frac{g}{L} \sin \theta$$

The right side is proportional to $\sin \theta$ rather than to θ ; hence, with $\sin \theta$ present, we would not expect simple harmonic motion because this expression is not of the form of Equation 13.17. However, if we assume that θ is small, we can use the approximation $\sin \theta \approx \theta$; thus the equation of motion for the simple pen-

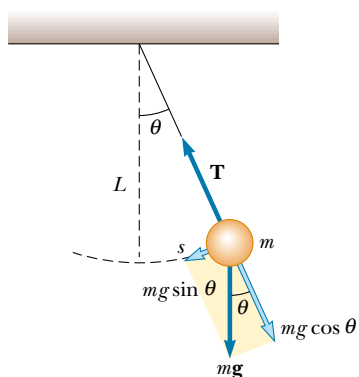


Figure 13.12 When θ is small, a simple pendulum oscillates in simple harmonic motion about the equilibrium position $\theta = 0$. The restoring force is $mg \sin \theta$, the component of the gravitational force tangent to the arc.



The motion of a simple pendulum, captured with multiflash photography. Is the oscillating motion simple harmonic in this case?

dulum becomes


$$\frac{d^2\theta}{dt^2} = -\frac{g}{L}\theta \quad (13.24)$$

Now we have an expression of the same form as Equation 13.17, and we conclude that the motion for small amplitudes of oscillation is simple harmonic motion. Therefore, θ can be written as $\theta = \theta_{\max} \cos(\omega t + \phi)$, where θ_{\max} is the *maximum angular displacement* and the angular frequency ω is

$$\omega = \sqrt{\frac{g}{L}} \quad (13.25)$$

Equation of motion for a simple pendulum (small θ)

Angular frequency of motion for a simple pendulum

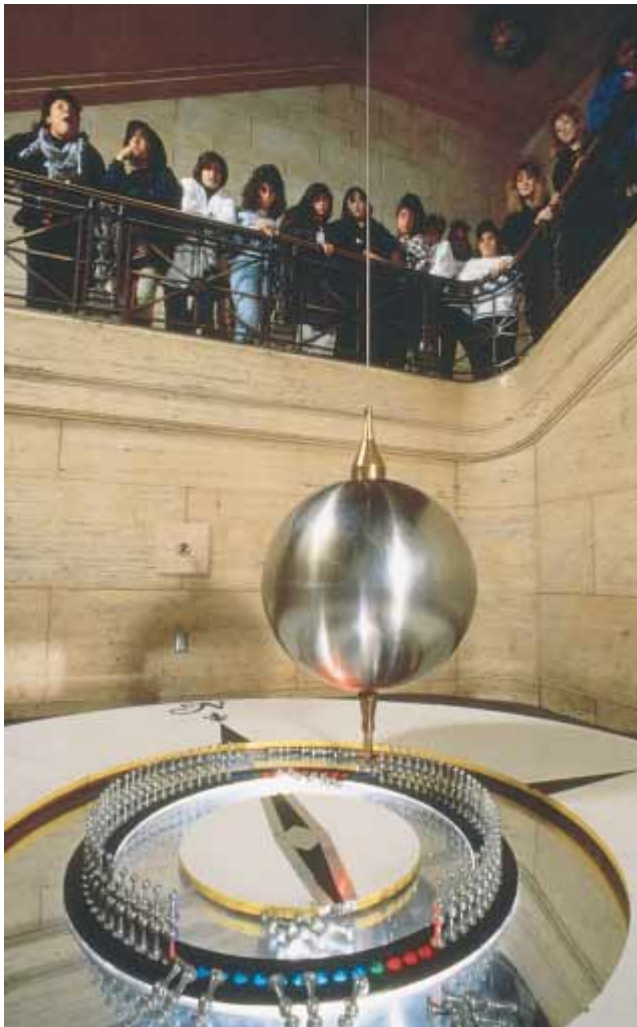

The Foucault pendulum at the Franklin Institute in Philadelphia. This type of pendulum was first used by the French physicist Jean Foucault to verify the Earth's rotation experimentally. As the pendulum swings, the vertical plane in which it oscillates appears to rotate as the bob successively knocks over the indicators arranged in a circle on the floor. In reality, the plane of oscillation is fixed in space, and the Earth rotating beneath the swinging pendulum moves the indicators into position to be knocked down, one after the other.

The period of the motion is

Period of motion for a simple pendulum

$$T = \frac{2\pi}{\omega} = 2\pi \sqrt{\frac{L}{g}} \quad (13.26)$$

In other words, **the period and frequency of a simple pendulum depend only on the length of the string and the acceleration due to gravity.** Because the period is independent of the mass, we conclude that all simple pendulums that are of equal length and are at the same location (so that g is constant) oscillate with the same period. The analogy between the motion of a simple pendulum and that of a block–spring system is illustrated in Figure 13.10.



The simple pendulum can be used as a timekeeper because its period depends only on its length and the local value of g . It is also a convenient device for making precise measurements of the free-fall acceleration. Such measurements are important because variations in local values of g can provide information on the location of oil and of other valuable underground resources.

Quick Quiz 13.5

A block of mass m is first allowed to hang from a spring in static equilibrium. It stretches the spring a distance L beyond the spring's unstressed length. The block and spring are then set into oscillation. Is the period of this system less than, equal to, or greater than the period of a simple pendulum having a length L and a bob mass m ?

EXAMPLE 13.5 A Connection Between Length and Time

Christian Huygens (1629–1695), the greatest clockmaker in history, suggested that an international unit of length could be defined as the length of a simple pendulum having a period of exactly 1 s. How much shorter would our length unit be had his suggestion been followed?

Thus, the meter's length would be slightly less than one-fourth its current length. Note that the number of significant digits depends only on how precisely we know g because the time has been defined to be exactly 1 s.

Solution Solving Equation 13.26 for the length gives

$$L = \frac{T^2 g}{4\pi^2} = \frac{(1 \text{ s})^2 (9.80 \text{ m/s}^2)}{4\pi^2} = 0.248 \text{ m}$$

QuickLab

Firmly hold a ruler so that about half of it is over the edge of your desk. With your other hand, pull down and then release the free end, watching how it vibrates. Now slide the ruler so that only about a quarter of it is free to vibrate. This time when you release it, how does the vibrational period compare with its earlier value? Why?

Physical Pendulum

Suppose you balance a wire coat hanger so that the hook is supported by your extended index finger. When you give the hanger a small displacement (with your other hand) and then release it, it oscillates. If a hanging object oscillates about a fixed axis that does not pass through its center of mass and the object cannot be approximated as a point mass, we cannot treat the system as a simple pendulum. In this case the system is called a **physical pendulum**.

Consider a rigid body pivoted at a point O that is a distance d from the center of mass (Fig. 13.13). The force of gravity provides a torque about an axis through O , and the magnitude of that torque is $mgd \sin \theta$, where θ is as shown in Figure 13.13. Using the law of motion $\Sigma \tau = I\alpha$, where I is the moment of inertia about

the axis through O , we obtain

$$-mgd \sin \theta = I \frac{d^2\theta}{dt^2}$$

The minus sign indicates that the torque about O tends to decrease θ . That is, the force of gravity produces a restoring torque. Because this equation gives us the angular acceleration $d^2\theta/dt^2$ of the pivoted body, we can consider it the equation of motion for the system. If we again assume that θ is small, the approximation $\sin \theta \approx \theta$ is valid, and the equation of motion reduces to

$$\frac{d^2\theta}{dt^2} = -\left(\frac{mgd}{I}\right)\theta = -\omega^2\theta \quad (13.27)$$

Because this equation is of the same form as Equation 13.17, the motion is simple harmonic motion. That is, the solution of Equation 13.27 is $\theta = \theta_{\max} \cos(\omega t + \phi)$, where θ_{\max} is the maximum angular displacement and

$$\omega = \sqrt{\frac{mgd}{I}}$$

The period is

$$T = \frac{2\pi}{\omega} = 2\pi \sqrt{\frac{I}{mgd}} \quad (13.28)$$

One can use this result to measure the moment of inertia of a flat rigid body. If the location of the center of mass—and hence the value of d —are known, the moment of inertia can be obtained by measuring the period. Finally, note that Equation 13.28 reduces to the period of a simple pendulum (Eq. 13.26) when $I = md^2$ —that is, when all the mass is concentrated at the center of mass.

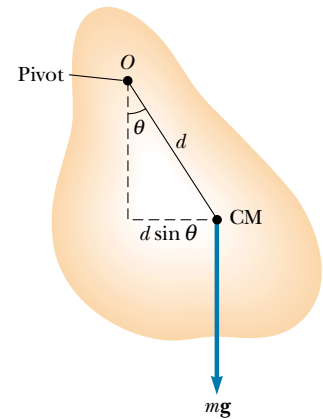


Figure 13.13 A physical pendulum.

Period of motion for a physical pendulum



EXAMPLE 13.6 A Swinging Rod

A uniform rod of mass M and length L is pivoted about one end and oscillates in a vertical plane (Fig. 13.14). Find the period of oscillation if the amplitude of the motion is small.

Solution In Chapter 10 we found that the moment of inertia of a uniform rod about an axis through one end is $\frac{1}{3}ML^2$. The distance d from the pivot to the center of mass is $L/2$. Substituting these quantities into Equation 13.28 gives

$$T = 2\pi \sqrt{\frac{\frac{1}{3}ML^2}{Mg \frac{L}{2}}} = 2\pi \sqrt{\frac{2L}{3g}}$$

Comment In one of the Moon landings, an astronaut walking on the Moon's surface had a belt hanging from his space suit, and the belt oscillated as a physical pendulum. A scientist on the Earth observed this motion on television and used it to estimate the free-fall acceleration on the Moon. How did the scientist make this calculation?

Exercise Calculate the period of a meter stick that is pivoted about one end and is oscillating in a vertical plane.

Answer 1.64 s.

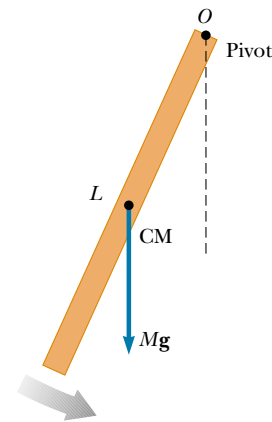


Figure 13.14 A rigid rod oscillating about a pivot through one end is a physical pendulum with $d = L/2$ and, from Table 10.2, $I = \frac{1}{3}ML^2$.

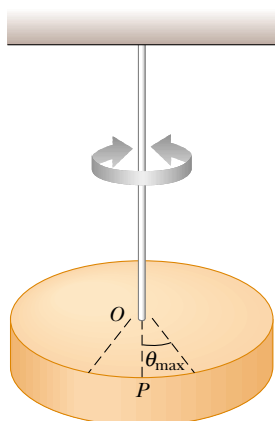


Figure 13.15 A torsional pendulum consists of a rigid body suspended by a wire attached to a rigid support. The body oscillates about the line OP with an amplitude θ_{\max} .

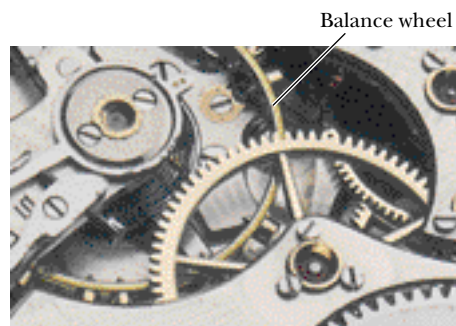


Figure 13.16 The balance wheel of this antique pocket watch is a torsional pendulum and regulates the time-keeping mechanism.

Torsional Pendulum

Figure 13.15 shows a rigid body suspended by a wire attached at the top to a fixed support. When the body is twisted through some small angle θ , the twisted wire exerts on the body a restoring torque that is proportional to the angular displacement. That is,

$$\tau = -\kappa\theta$$

where κ (kappa) is called the *torsion constant* of the support wire. The value of κ can be obtained by applying a known torque to twist the wire through a measurable angle θ . Applying Newton's second law for rotational motion, we find

$$\begin{aligned}\tau = -\kappa\theta &= I \frac{d^2\theta}{dt^2} \\ \frac{d^2\theta}{dt^2} &= -\frac{\kappa}{I} \theta\end{aligned}\quad (13.29)$$

Again, this is the equation of motion for a simple harmonic oscillator, with $\omega = \sqrt{\kappa/I}$ and a period

$$T = 2\pi \sqrt{\frac{I}{\kappa}}\quad (13.30)$$

This system is called a *torsional pendulum*. There is no small-angle restriction in this situation as long as the elastic limit of the wire is not exceeded. Figure 13.16 shows the balance wheel of a watch oscillating as a torsional pendulum, energized by the mainspring.

Period of motion for a torsional pendulum



13.5 COMPARING SIMPLE HARMONIC MOTION WITH UNIFORM CIRCULAR MOTION



We can better understand and visualize many aspects of simple harmonic motion by studying its relationship to uniform circular motion. Figure 13.17 is an overhead view of an experimental arrangement that shows this relationship. A ball is attached to the rim of a turntable of radius A , which is illuminated from the side by a lamp. The ball casts a shadow on a screen. We find that as the turntable rotates with constant angular speed, the shadow of the ball moves back and forth in simple harmonic motion.

Consider a particle located at point P on the circumference of a circle of radius A , as shown in Figure 13.18a, with the line OP making an angle ϕ with the x axis at $t = 0$. We call this circle a *reference circle* for comparing simple harmonic motion and uniform circular motion, and we take the position of P at $t = 0$ as our reference position. If the particle moves along the circle with constant angular speed ω until OP makes an angle θ with the x axis, as illustrated in Figure 13.18b, then at some time $t > 0$, the angle between OP and the x axis is $\theta = \omega t + \phi$. As the particle moves along the circle, the projection of P on the x axis, labeled point Q , moves back and forth along the x axis, between the limits $x = \pm A$.

Note that points P and Q always have the same x coordinate. From the right triangle OPQ , we see that this x coordinate is

$$x = A \cos(\omega t + \phi) \quad (13.31)$$

This expression shows that the point Q moves with simple harmonic motion along the x axis. Therefore, we conclude that

simple harmonic motion along a straight line can be represented by the projection of uniform circular motion along a diameter of a reference circle.

We can make a similar argument by noting from Figure 13.18b that the projection of P along the y axis also exhibits simple harmonic motion. Therefore, **uniform circular motion can be considered a combination of two simple harmonic motions**, one along the x axis and one along the y axis, with the two differing in phase by 90° .

This geometric interpretation shows that the time for one complete revolution of the point P on the reference circle is equal to the period of motion T for simple harmonic motion between $x = \pm A$. That is, the angular speed ω of P is the same as the angular frequency ω of simple harmonic motion along the x axis (this is why we use the same symbol). The phase constant ϕ for simple harmonic motion corresponds to the initial angle that OP makes with the x axis. The radius A of the reference circle equals the amplitude of the simple harmonic motion.

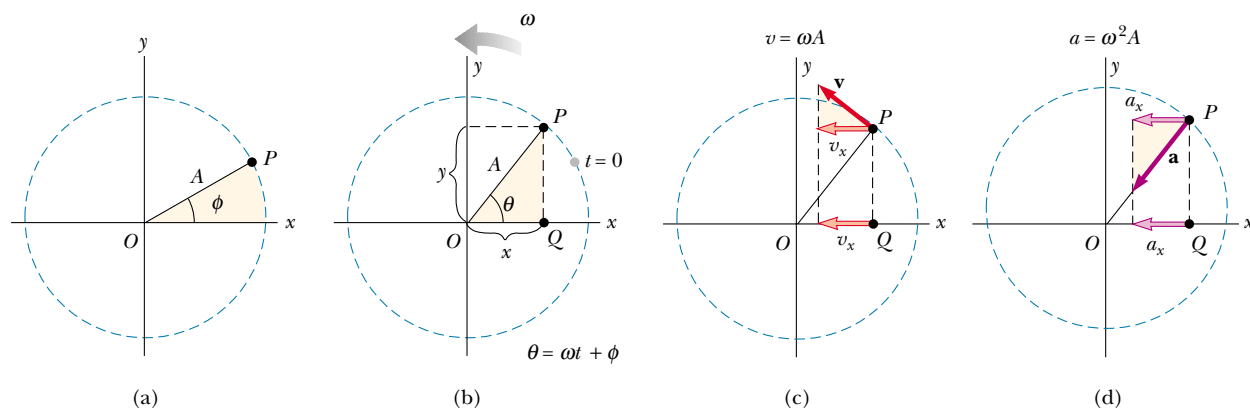


Figure 13.18 Relationship between the uniform circular motion of a point P and the simple harmonic motion of a point Q . A particle at P moves in a circle of radius A with constant angular speed ω . (a) A reference circle showing the position of P at $t = 0$. (b) The x coordinates of points P and Q are equal and vary in time as $x = A \cos(\omega t + \phi)$. (c) The x component of the velocity of P equals the velocity of Q . (d) The x component of the acceleration of P equals the acceleration of Q .

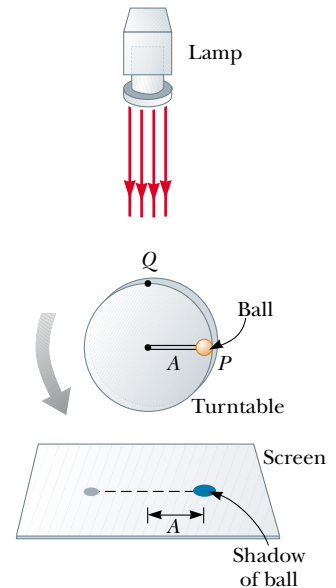


Figure 13.17 An experimental setup for demonstrating the connection between simple harmonic motion and uniform circular motion. As the ball rotates on the turntable with constant angular speed, its shadow on the screen moves back and forth in simple harmonic motion.

Because the relationship between linear and angular speed for circular motion is $v = r\omega$ (see Eq. 10.10), the particle moving on the reference circle of radius A has a velocity of magnitude ωA . From the geometry in Figure 13.18c, we see that the x component of this velocity is $-\omega A \sin(\omega t + \phi)$. By definition, the point Q has a velocity given by dx/dt . Differentiating Equation 13.31 with respect to time, we find that the velocity of Q is the same as the x component of the velocity of P .

The acceleration of P on the reference circle is directed radially inward toward O and has a magnitude $v^2/A = \omega^2 A$. From the geometry in Figure 13.18d, we see that the x component of this acceleration is $-\omega^2 A \cos(\omega t + \phi)$. This value is also the acceleration of the projected point Q along the x axis, as you can verify by taking the second derivative of Equation 13.31.

EXAMPLE 13.7 Circular Motion with Constant Angular Speed

A particle rotates counterclockwise in a circle of radius 3.00 m with a constant angular speed of 8.00 rad/s. At $t = 0$, the particle has an x coordinate of 2.00 m and is moving to the right. (a) Determine the x coordinate as a function of time.

Solution Because the amplitude of the particle's motion equals the radius of the circle and $\omega = 8.00$ rad/s, we have

$$x = A \cos(\omega t + \phi) = (3.00 \text{ m}) \cos(8.00t + \phi)$$

We can evaluate ϕ by using the initial condition that $x = 2.00$ m at $t = 0$:

$$2.00 \text{ m} = (3.00 \text{ m}) \cos(0 + \phi)$$

$$\phi = \cos^{-1}\left(\frac{2.00 \text{ m}}{3.00 \text{ m}}\right)$$

If we were to take our answer as $\phi = 48.2^\circ$, then the coordinate $x = (3.00 \text{ m}) \cos(8.00t + 48.2^\circ)$ would be decreasing at time $t = 0$ (that is, moving to the left). Because our particle is first moving to the right, we must choose $\phi = -48.2^\circ = -0.841$ rad. The x coordinate as a function of time is then

$$x = (3.00 \text{ m}) \cos(8.00t - 0.841)$$

Note that ϕ in the cosine function must be in radians.

(b) Find the x components of the particle's velocity and acceleration at any time t .

Solution

$$\begin{aligned} v_x &= \frac{dx}{dt} = (-3.00 \text{ m})(8.00 \text{ rad/s}) \sin(8.00t - 0.841) \\ &= -(24.0 \text{ m/s}) \sin(8.00t - 0.841) \end{aligned}$$

$$\begin{aligned} a_x &= \frac{dv_x}{dt} = (-24.0 \text{ m/s})(8.00 \text{ rad/s}) \cos(8.00t - 0.841) \\ &= -(192 \text{ m/s}^2) \cos(8.00t - 0.841) \end{aligned}$$

From these results, we conclude that $v_{\max} = 24.0$ m/s and that $a_{\max} = 192$ m/s². Note that these values also equal the tangential speed ωA and the centripetal acceleration $\omega^2 A$.

Optional Section

13.6 DAMPED OSCILLATIONS

The oscillatory motions we have considered so far have been for ideal systems—that is, systems that oscillate indefinitely under the action of a linear restoring force. In many real systems, dissipative forces, such as friction, retard the motion. Consequently, the mechanical energy of the system diminishes in time, and the motion is said to be *damped*.

One common type of retarding force is the one discussed in Section 6.4, where the force is proportional to the speed of the moving object and acts in the direction opposite the motion. This retarding force is often observed when an object moves through air, for instance. Because the retarding force can be expressed as $\mathbf{R} = -b\mathbf{v}$ (where b is a constant called the *damping coefficient*) and the restoring

force of the system is $-kx$, we can write Newton's second law as

$$\begin{aligned} \sum F_x &= -kx - bv = ma_x \\ -kx - b \frac{dx}{dt} &= m \frac{d^2x}{dt^2} \end{aligned} \quad (13.32)$$

The solution of this equation requires mathematics that may not be familiar to you yet; we simply state it here without proof. When the retarding force is small compared with the maximum restoring force—that is, when b is small—the solution to Equation 13.32 is

$$x = Ae^{-\frac{b}{2m}t} \cos(\omega t + \phi) \quad (13.33)$$

where the angular frequency of oscillation is

$$\omega = \sqrt{\frac{k}{m} - \left(\frac{b}{2m}\right)^2} \quad (13.34)$$

This result can be verified by substituting Equation 13.33 into Equation 13.32.

Figure 13.19a shows the displacement as a function of time for an object oscillating in the presence of a retarding force, and Figure 13.19b depicts one such system: a block attached to a spring and submerged in a viscous liquid. We see that **when the retarding force is much smaller than the restoring force, the oscillatory character of the motion is preserved but the amplitude decreases in time, with the result that the motion ultimately ceases.** Any system that behaves in this way is known as a **damped oscillator**. The dashed blue lines in Figure 13.19a, which define the *envelope* of the oscillatory curve, represent the exponential factor in Equation 13.33. This envelope shows that **the amplitude decays exponentially with time.** For motion with a given spring constant and block mass, the oscillations dampen more rapidly as the maximum value of the retarding force approaches the maximum value of the restoring force.


It is convenient to express the angular frequency of a damped oscillator in the form

$$\omega = \sqrt{\omega_0^2 - \left(\frac{b}{2m}\right)^2}$$


where $\omega_0 = \sqrt{k/m}$ represents the angular frequency in the absence of a retarding force (the undamped oscillator) and is called the **natural frequency** of the system. When the magnitude of the maximum retarding force $R_{\max} = bv_{\max} < kA$, the system is said to be **underdamped**. As the value of R approaches kA , the amplitudes of the oscillations decrease more and more rapidly. This motion is represented by the blue curve in Figure 13.20. When b reaches a critical value b_c such that $b_c/2m = \omega_0$, the system does not oscillate and is said to be **critically damped**. In this case the system, once released from rest at some nonequilibrium position, returns to equilibrium and then stays there. The graph of displacement versus time for this case is the red curve in Figure 13.20.

If the medium is so viscous that the retarding force is greater than the restoring force—that is, if $R_{\max} = bv_{\max} > kA$ and $b/2m > \omega_0$ —the system is **overdamped**. Again, the displaced system, when free to move, does not oscillate but simply returns to its equilibrium position. As the damping increases, the time it takes the system to approach equilibrium also increases, as indicated by the black curve in Figure 13.20.

In any case in which friction is present, whether the system is overdamped or underdamped, the energy of the oscillator eventually falls to zero. The lost mechanical energy dissipates into internal energy in the retarding medium.

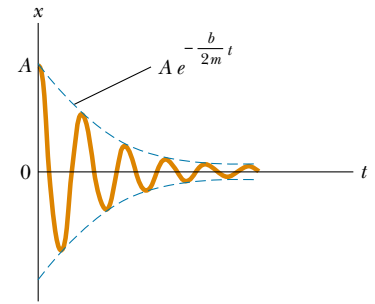

(a)



(b)

Figure 13.19 (a) Graph of displacement versus time for a damped oscillator. Note the decrease in amplitude with time. (b) One example of a damped oscillator is a mass attached to a spring and submerged in a viscous liquid.

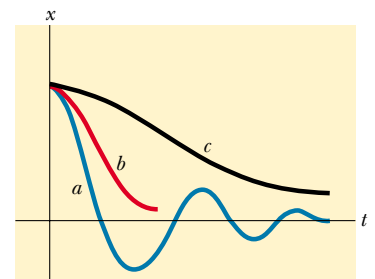


Figure 13.20 Graphs of displacement versus time for (a) an underdamped oscillator, (b) a critically damped oscillator, and (c) an overdamped oscillator.

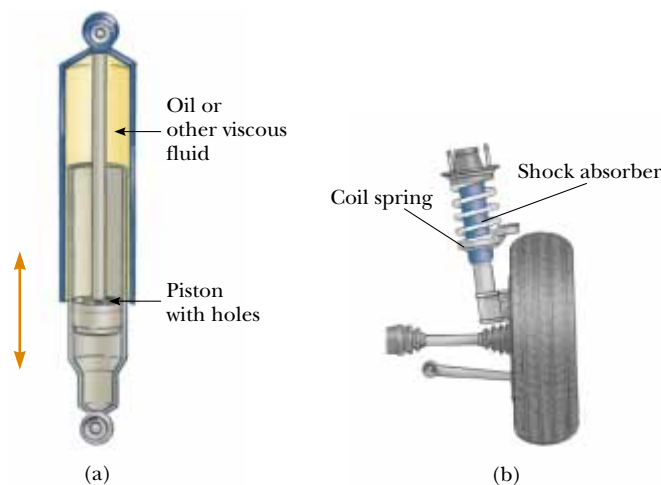


Figure 13.21 (a) A shock absorber consists of a piston oscillating in a chamber filled with oil. As the piston oscillates, the oil is squeezed through holes between the piston and the chamber, causing a damping of the piston's oscillations. (b) One type of automotive suspension system, in which a shock absorber is placed inside a coil spring at each wheel.

web

To learn more about shock absorbers, visit <http://www.hdridecontrol.com>

Quick Quiz 13.6

An automotive suspension system consists of a combination of springs and shock absorbers, as shown in Figure 13.21. If you were an automotive engineer, would you design a suspension system that was underdamped, critically damped, or overdamped? Discuss each case.

Optional Section

13.7 FORCED OSCILLATIONS

It is possible to compensate for energy loss in a damped system by applying an external force that does positive work on the system. At any instant, energy can be put into the system by an applied force that acts in the direction of motion of the oscillator. For example, a child on a swing can be kept in motion by appropriately timed pushes. The amplitude of motion remains constant if the energy input per cycle exactly equals the energy lost as a result of damping. Any motion of this type is called **forced oscillation**.

A common example of a forced oscillator is a damped oscillator driven by an external force that varies periodically, such as $F = F_{\text{ext}} \cos \omega t$, where ω is the angular frequency of the periodic force and F_{ext} is a constant. Adding this driving force to the left side of Equation 13.32 gives

$$F_{\text{ext}} \cos \omega t - kx - b \frac{dx}{dt} = m \frac{d^2x}{dt^2} \quad (13.35)$$

(As earlier, we present the solution of this equation without proof.) After a sufficiently long period of time, when the energy input per cycle equals the energy lost per cycle, a steady-state condition is reached in which the oscillations proceed with constant amplitude. At this time, when the system is in a steady state, the solution of Equation 13.35 is

$$x = A \cos(\omega t + \phi) \quad (13.36)$$

where

$$A = \frac{F_{\text{ext}}/m}{\sqrt{(\omega^2 - \omega_0^2)^2 + \left(\frac{b\omega}{m}\right)^2}} \quad (13.37)$$

and where $\omega_0 = \sqrt{k/m}$ is the angular frequency of the undamped oscillator ($b = 0$). One could argue that in steady state the oscillator must physically have the same frequency as the driving force, and thus the solution given by Equation 13.36 is expected. In fact, when this solution is substituted into Equation 13.35, one finds that it is indeed a solution, provided the amplitude is given by Equation 13.37.

Equation 13.37 shows that, because an external force is driving it, the motion of the forced oscillator is not damped. The external agent provides the necessary energy to overcome the losses due to the retarding force. Note that the system oscillates at the angular frequency ω of the driving force. For small damping, the amplitude becomes very large when the frequency of the driving force is near the natural frequency of oscillation. The dramatic increase in amplitude near the natural frequency ω_0 is called **resonance**, and for this reason ω_0 is sometimes called the **resonance frequency** of the system.

The reason for large-amplitude oscillations at the resonance frequency is that energy is being transferred to the system under the most favorable conditions. We can better understand this by taking the first time derivative of x in Equation 13.36, which gives an expression for the velocity of the oscillator. We find that v is proportional to $\sin(\omega t + \phi)$. When the applied force \mathbf{F} is in phase with the velocity, the rate at which work is done on the oscillator by \mathbf{F} equals the dot product $\mathbf{F} \cdot \mathbf{v}$. Remember that “rate at which work is done” is the definition of power. Because the product $\mathbf{F} \cdot \mathbf{v}$ is a maximum when \mathbf{F} and \mathbf{v} are in phase, we conclude that **at resonance the applied force is in phase with the velocity and that the power transferred to the oscillator is a maximum.**

Figure 13.22 is a graph of amplitude as a function of frequency for a forced oscillator with and without damping. Note that the amplitude increases with decreasing damping ($b \rightarrow 0$) and that the resonance curve broadens as the damping increases. Under steady-state conditions and at any driving frequency, the energy transferred into the system equals the energy lost because of the damping force; hence, the average total energy of the oscillator remains constant. In the absence of a damping force ($b = 0$), we see from Equation 13.37 that the steady-state amplitude approaches infinity as $\omega \rightarrow \omega_0$. In other words, if there are no losses in the system and if we continue to drive an initially motionless oscillator with a periodic force that is in phase with the velocity, the amplitude of motion builds without limit (see the red curve in Fig. 13.22). This limitless building does not occur in practice because some damping is always present.

The behavior of a driven oscillating system after the driving force is removed depends on b and on how close ω was to ω_0 . This behavior is sometimes quantified by a parameter called the *quality factor* Q . The closer a system is to being undamped, the greater its Q . The amplitude of oscillation drops by a factor of e ($= 2.718 \dots$) in Q/π cycles.

Later in this book we shall see that resonance appears in other areas of physics. For example, certain electrical circuits have natural frequencies. A bridge has natural frequencies that can be set into resonance by an appropriate driving force. A dramatic example of such resonance occurred in 1940, when the Tacoma Narrows Bridge in the state of Washington was destroyed by resonant vibrations. Although the winds were not particularly strong on that occasion, the bridge ultimately collapsed (Fig. 13.23) because the bridge design had no built-in safety features.

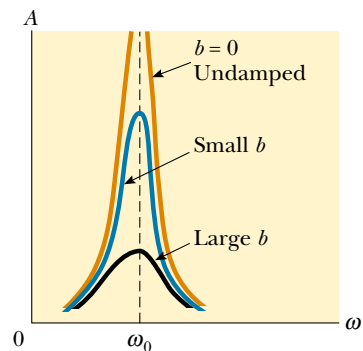
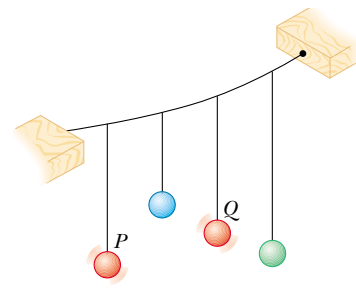


Figure 13.22 Graph of amplitude versus frequency for a damped oscillator when a periodic driving force is present. When the frequency of the driving force equals the natural frequency ω_0 , resonance occurs. Note that the shape of the resonance curve depends on the size of the damping coefficient b .

QuickLab

Tie several objects to strings and suspend them from a horizontal string, as illustrated in the figure. Make two of the hanging strings approximately the same length. If one of this pair, such as P , is set into sideways motion, all the others begin to oscillate. But Q , whose length is the same as that of P , oscillates with the greatest amplitude. Must all the masses have the same value?



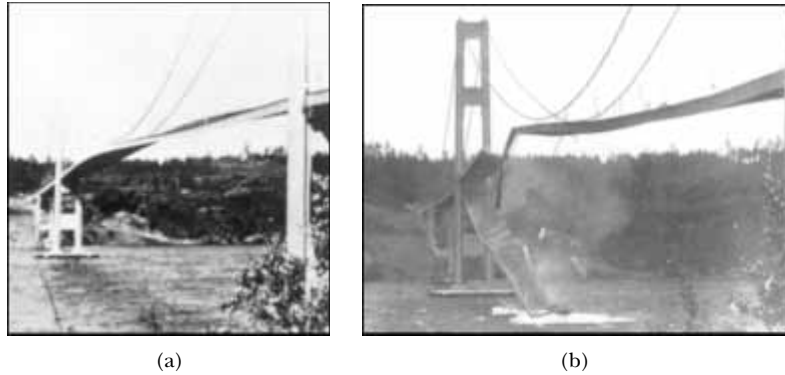


Figure 13.23 (a) In 1940 turbulent winds set up torsional vibrations in the Tacoma Narrows Bridge, causing it to oscillate at a frequency near one of the natural frequencies of the bridge structure. (b) Once established, this resonance condition led to the bridge's collapse.

Many other examples of resonant vibrations can be cited. A resonant vibration that you may have experienced is the “singing” of telephone wires in the wind. Machines often break if one vibrating part is at resonance with some other moving part. Soldiers marching in cadence across a bridge have been known to set up resonant vibrations in the structure and thereby cause it to collapse. Whenever any real physical system is driven near its resonance frequency, you can expect oscillations of very large amplitudes.

SUMMARY

When the acceleration of an object is proportional to its displacement from some equilibrium position and is in the direction opposite the displacement, the object moves with simple harmonic motion. The position x of a simple harmonic oscillator varies periodically in time according to the expression

$$x = A \cos(\omega t + \phi) \quad (13.3)$$

where A is the **amplitude** of the motion, ω is the **angular frequency**, and ϕ is the **phase constant**. The value of ϕ depends on the initial position and initial velocity of the oscillator. You should be able to use this formula to describe the motion of an object undergoing simple harmonic motion.

The time T needed for one complete oscillation is defined as the **period** of the motion:

$$T = \frac{2\pi}{\omega} \quad (13.4)$$

The inverse of the period is the **frequency** of the motion, which equals the number of oscillations per second.

The velocity and acceleration of a simple harmonic oscillator are

$$v = \frac{dx}{dt} = -\omega A \sin(\omega t + \phi) \quad (13.7)$$

$$a = \frac{dv}{dt} = -\omega^2 A \cos(\omega t + \phi) \quad (13.8)$$

$$v = \pm \omega \sqrt{A^2 - x^2} \quad (13.23)$$

Thus, the maximum speed is ωA , and the maximum acceleration is $\omega^2 A$. The speed is zero when the oscillator is at its turning points, $x = \pm A$, and is a maximum when the oscillator is at the equilibrium position $x = 0$. The magnitude of the acceleration is a maximum at the turning points and zero at the equilibrium position. You should be able to find the velocity and acceleration of an oscillating object at any time if you know the amplitude, angular frequency, and phase constant.

A block–spring system moves in simple harmonic motion on a frictionless surface, with a period

$$T = \frac{2\pi}{\omega} = 2\pi \sqrt{\frac{m}{k}} \quad (13.18)$$

The kinetic energy and potential energy for a simple harmonic oscillator vary with time and are given by

$$K = \frac{1}{2} mv^2 = \frac{1}{2} m\omega^2 A^2 \sin^2(\omega t + \phi) \quad (13.20)$$

$$U = \frac{1}{2} kx^2 = \frac{1}{2} kA^2 \cos^2(\omega t + \phi) \quad (13.21)$$

These three formulas allow you to analyze a wide variety of situations involving oscillations. Be sure you recognize how the mass of the block and the spring constant of the spring enter into the calculations.

The total energy of a simple harmonic oscillator is a constant of the motion and is given by

$$E = \frac{1}{2} kA^2 \quad (13.22)$$

The potential energy of the oscillator is a maximum when the oscillator is at its turning points and is zero when the oscillator is at the equilibrium position. The kinetic energy is zero at the turning points and a maximum at the equilibrium position. You should be able to determine the division of energy between potential and kinetic forms at any time t .

A **simple pendulum** of length L moves in simple harmonic motion. For small angular displacements from the vertical, its period is

$$T = 2\pi \sqrt{\frac{L}{g}} \quad (13.26)$$

For small angular displacements from the vertical, a **physical pendulum** moves in simple harmonic motion about a pivot that does not go through the center of mass. The period of this motion is

$$T = 2\pi \sqrt{\frac{I}{mgd}} \quad (13.28)$$

where I is the moment of inertia about an axis through the pivot and d is the distance from the pivot to the center of mass. You should be able to distinguish when to use the simple-pendulum formula and when the system must be considered a physical pendulum.



Uniform circular motion can be considered a combination of two simple harmonic motions, one along the x axis and the other along the y axis, with the two differing in phase by 90° .

QUESTIONS

1. Is a bouncing ball an example of simple harmonic motion? Is the daily movement of a student from home to school and back simple harmonic motion? Why or why not?
2. If the coordinate of a particle varies as $x = -A \cos \omega t$, what is the phase constant in Equation 13.3? At what position does the particle begin its motion?

3. Does the displacement of an oscillating particle between $t = 0$ and a later time t necessarily equal the position of the particle at time t ? Explain.
4. Determine whether the following quantities can be in the same direction for a simple harmonic oscillator: (a) displacement and velocity, (b) velocity and acceleration, (c) displacement and acceleration.
5. Can the amplitude A and the phase constant ϕ be determined for an oscillator if only the position is specified at $t = 0$? Explain.
6. Describe qualitatively the motion of a mass–spring system when the mass of the spring is not neglected.
7. Make a graph showing the potential energy of a stationary block hanging from a spring, $U = \frac{1}{2}ky^2 + mgy$. Why is the lowest part of the graph offset from the origin?
8. A block–spring system undergoes simple harmonic motion with an amplitude A . Does the total energy change if the mass is doubled but the amplitude is not changed? Do the kinetic and potential energies depend on the mass? Explain.
9. What happens to the period of a simple pendulum if the pendulum's length is doubled? What happens to the period if the mass of the suspended bob is doubled?
10. A simple pendulum is suspended from the ceiling of a stationary elevator, and the period is determined. Describe the changes, if any, in the period when the elevator
 - (a) accelerates upward, (b) accelerates downward, and (c) moves with constant velocity.
11. A simple pendulum undergoes simple harmonic motion when θ is small. Is the motion periodic when θ is large? How does the period of motion change as θ increases?
12. Will damped oscillations occur for any values of b and k ? Explain.
13. As it possible to have damped oscillations when a system is at resonance? Explain.
14. At resonance, what does the phase constant ϕ equal in Equation 13.36? (*Hint*: Compare this equation with the expression for the driving force, which must be in phase with the velocity at resonance.)
15. Some parachutes have holes in them to allow air to move smoothly through them. Without such holes, sometimes the air that has gathered beneath the chute as a parachutist falls is released from under its edges alternately and periodically, at one side and then at the other. Why might this periodic release of air cause a problem?
16. If a grandfather clock were running slowly, how could we adjust the length of the pendulum to correct the time?
17. A pendulum bob is made from a sphere filled with water. What would happen to the frequency of vibration of this pendulum if the sphere had a hole in it that allowed the water to leak out slowly?

PROBLEMS

1, 2, 3 = straightforward, intermediate, challenging = full solution available in the *Student Solutions Manual and Study Guide*
 WEB = solution posted at <http://www.saunderscollege.com/physics/>  = Computer useful in solving problem  = Interactive Physics
 = paired numerical/symbolic problems

Section 13.1 Simple Harmonic Motion

1. The displacement of a particle at $t = 0.250$ s is given by the expression $x = (4.00 \text{ m}) \cos(3.00\pi t + \pi)$, where x is in meters and t is in seconds. Determine (a) the frequency and period of the motion, (b) the amplitude of the motion, (c) the phase constant, and (d) the displacement of the particle at $t = 0.250$ s.
2. A ball dropped from a height of 4.00 m makes a perfectly elastic collision with the ground. Assuming that no energy is lost due to air resistance, (a) show that the motion is periodic and (b) determine the period of the motion. (c) Is the motion simple harmonic? Explain.
3. A particle moves in simple harmonic motion with a frequency of 3.00 oscillations/s and an amplitude of 5.00 cm. (a) Through what total distance does the particle move during one cycle of its motion? (b) What is its maximum speed? Where does this occur? (c) Find the maximum acceleration of the particle. Where in the motion does the maximum acceleration occur?
4. In an engine, a piston oscillates with simple harmonic motion so that its displacement varies according to the expression

$$x = (5.00 \text{ cm}) \cos(2t + \pi/6)$$
 where x is in centimeters and t is in seconds. At $t = 0$,
 - find (a) the displacement of the particle, (b) its velocity, and (c) its acceleration. (d) Find the period and amplitude of the motion.

- WEB 5. A particle moving along the x axis in simple harmonic motion starts from its equilibrium position, the origin, at $t = 0$ and moves to the right. The amplitude of its motion is 2.00 cm, and the frequency is 1.50 Hz. (a) Show that the displacement of the particle is given by $x = (2.00 \text{ cm}) \sin(3.00\pi t)$. Determine (b) the maximum speed and the earliest time ($t > 0$) at which the particle has this speed, (c) the maximum acceleration and the earliest time ($t > 0$) at which the particle has this acceleration, and (d) the total distance traveled between $t = 0$ and $t = 1.00$ s.
6. The initial position and initial velocity of an object moving in simple harmonic motion are x_i and v_i ; the angular frequency of oscillation is ω . (a) Show that the position and velocity of the object for all time can be written as

$$x(t) = x_i \cos \omega t + \left(\frac{v_i}{\omega}\right) \sin \omega t$$

$$v(t) = -x_i \omega \sin \omega t + v_i \cos \omega t$$

(b) If the amplitude of the motion is A , show that

$$v^2 - ax = v_i^2 - a_i x_i = \omega^2 A^2$$

Section 13.2 The Block–Spring System Revisited

Note: Neglect the mass of the spring in all problems in this section.

7. A spring stretches by 3.90 cm when a 10.0-g mass is hung from it. If a 25.0-g mass attached to this spring oscillates in simple harmonic motion, calculate the period of the motion.
8. A simple harmonic oscillator takes 12.0 s to undergo five complete vibrations. Find (a) the period of its motion, (b) the frequency in hertz, and (c) the angular frequency in radians per second.
9. A 0.500-kg mass attached to a spring with a force constant of 8.00 N/m vibrates in simple harmonic motion with an amplitude of 10.0 cm. Calculate (a) the maximum value of its speed and acceleration, (b) the speed and acceleration when the mass is 6.00 cm from the equilibrium position, and (c) the time it takes the mass to move from $x = 0$ to $x = 8.00$ cm.
10. A 1.00-kg mass attached to a spring with a force constant of 25.0 N/m oscillates on a horizontal, frictionless track. At $t = 0$, the mass is released from rest at $x = -3.00$ cm. (That is, the spring is compressed by 3.00 cm.) Find (a) the period of its motion; (b) the maximum values of its speed and acceleration; and (c) the displacement, velocity, and acceleration as functions of time.
11. A 7.00-kg mass is hung from the bottom end of a vertical spring fastened to an overhead beam. The mass is set into vertical oscillations with a period of 2.60 s. Find the force constant of the spring.
12. A block of unknown mass is attached to a spring with a spring constant of 6.50 N/m and undergoes simple harmonic motion with an amplitude of 10.0 cm. When the mass is halfway between its equilibrium position and the end point, its speed is measured to be $+30.0$ cm/s. Calculate (a) the mass of the block, (b) the period of the motion, and (c) the maximum acceleration of the block.
13. A particle that hangs from a spring oscillates with an angular frequency of 2.00 rad/s. The spring–particle system is suspended from the ceiling of an elevator car and hangs motionless (relative to the elevator car) as the car descends at a constant speed of 1.50 m/s. The car then stops suddenly. (a) With what amplitude does the particle oscillate? (b) What is the equation of motion for the particle? (Choose upward as the positive direction.)
14. A particle that hangs from a spring oscillates with an angular frequency ω . The spring–particle system is suspended from the ceiling of an elevator car and hangs motionless (relative to the elevator car) as the car descends at a constant speed v . The car then stops suddenly. (a) With what amplitude does the particle oscillate? (b) What is the equation of motion for the particle? (Choose upward as the positive direction.)
15. A 1.00-kg mass is attached to a horizontal spring. The spring is initially stretched by 0.100 m, and the mass is

released from rest there. It proceeds to move without friction. After 0.500 s, the speed of the mass is zero. What is the maximum speed of the mass?

Section 13.3 Energy of the Simple Harmonic Oscillator

Note: Neglect the mass of the spring in all problems in this section.

16. A 200-g mass is attached to a spring and undergoes simple harmonic motion with a period of 0.250 s. If the total energy of the system is 2.00 J, find (a) the force constant of the spring and (b) the amplitude of the motion.
17. An automobile having a mass of 1 000 kg is driven into a brick wall in a safety test. The bumper behaves as a spring of constant 5.00×10^6 N/m and compresses 3.16 cm as the car is brought to rest. What was the speed of the car before impact, assuming that no energy is lost during impact with the wall?
18. A mass–spring system oscillates with an amplitude of 3.50 cm. If the spring constant is 250 N/m and the mass is 0.500 kg, determine (a) the mechanical energy of the system, (b) the maximum speed of the mass, and (c) the maximum acceleration.
19. A 50.0-g mass connected to a spring with a force constant of 35.0 N/m oscillates on a horizontal, frictionless surface with an amplitude of 4.00 cm. Find (a) the total energy of the system and (b) the speed of the mass when the displacement is 1.00 cm. Find (c) the kinetic energy and (d) the potential energy when the displacement is 3.00 cm.
20. A 2.00-kg mass is attached to a spring and placed on a horizontal, smooth surface. A horizontal force of 20.0 N is required to hold the mass at rest when it is pulled 0.200 m from its equilibrium position (the origin of the x axis). The mass is now released from rest with an initial displacement of $x_i = 0.200$ m, and it subsequently undergoes simple harmonic oscillations. Find (a) the force constant of the spring, (b) the frequency of the oscillations, and (c) the maximum speed of the mass. Where does this maximum speed occur? (d) Find the maximum acceleration of the mass. Where does it occur? (e) Find the total energy of the oscillating system. Find (f) the speed and (g) the acceleration when the displacement equals one third of the maximum value.
21. A 1.50-kg block at rest on a tabletop is attached to a horizontal spring having force constant of 19.6 N/m. The spring is initially unstretched. A constant 20.0-N horizontal force is applied to the object, causing the spring to stretch. (a) Determine the speed of the block after it has moved 0.300 m from equilibrium, assuming that the surface between the block and the tabletop is frictionless. (b) Answer part (a) for a coefficient of kinetic friction of 0.200 between the block and the tabletop.
22. The amplitude of a system moving in simple harmonic motion is doubled. Determine the change in (a) the total energy, (b) the maximum speed, (c) the maximum acceleration, and (d) the period.

- 23.** A particle executes simple harmonic motion with an amplitude of 3.00 cm. At what displacement from the midpoint of its motion does its speed equal one half of its maximum speed?
- 24.** A mass on a spring with a constant of 3.24 N/m vibrates, with its position given by the equation $x = (5.00 \text{ cm}) \cos(3.60t \text{ rad/s})$. (a) During the first cycle, for $0 < t < 1.75 \text{ s}$, when is the potential energy of the system changing most rapidly into kinetic energy? (b) What is the maximum rate of energy transformation?

Section 13.4 The Pendulum

- 25.** A man enters a tall tower, needing to know its height. He notes that a long pendulum extends from the ceiling almost to the floor and that its period is 12.0 s. (a) How tall is the tower? (b) If this pendulum is taken to the Moon, where the free-fall acceleration is 1.67 m/s^2 , what is its period there?
- 26.** A “seconds” pendulum is one that moves through its equilibrium position once each second. (The period of the pendulum is 2.000 s.) The length of a seconds pendulum is 0.992 7 m at Tokyo and 0.994 2 m at Cambridge, England. What is the ratio of the free-fall accelerations at these two locations?
- 27.** A rigid steel frame above a street intersection supports standard traffic lights, each of which is hinged to hang immediately below the frame. A gust of wind sets a light swinging in a vertical plane. Find the order of magnitude of its period. State the quantities you take as data and their values.
- 28.** The angular displacement of a pendulum is represented by the equation $\theta = (0.320 \text{ rad}) \cos \omega t$, where θ is in radians and $\omega = 4.43 \text{ rad/s}$. Determine the period and length of the pendulum.
- WEB 29.** A simple pendulum has a mass of 0.250 kg and a length of 1.00 m. It is displaced through an angle of 15.0° and then released. What are (a) the maximum speed, (b) the maximum angular acceleration, and (c) the maximum restoring force?
- 30.** A simple pendulum is 5.00 m long. (a) What is the period of simple harmonic motion for this pendulum if it is hanging in an elevator that is accelerating upward at 5.00 m/s^2 ? (b) What is its period if the elevator is accelerating downward at 5.00 m/s^2 ? (c) What is the period of simple harmonic motion for this pendulum if it is placed in a truck that is accelerating horizontally at 5.00 m/s^2 ?
- 31.** A particle of mass m slides without friction inside a hemispherical bowl of radius R . Show that, if it starts from rest with a small displacement from equilibrium, the particle moves in simple harmonic motion with an angular frequency equal to that of a simple pendulum of length R . That is, $\omega = \sqrt{g/R}$.
- 32.** A mass is attached to the end of a string to form a simple pendulum. The period of its harmonic motion is

measured for small angular displacements and three lengths; in each case, the motion is clocked with a stopwatch for 50 oscillations. For lengths of 1.000 m, 0.750 m, and 0.500 m, total times of 99.8 s, 86.6 s, and 71.1 s, respectively, are measured for the 50 oscillations. (a) Determine the period of motion for each length. (b) Determine the mean value of g obtained from these three independent measurements, and compare it with the accepted value. (c) Plot T^2 versus L , and obtain a value for g from the slope of your best-fit straight-line graph. Compare this value with that obtained in part (b).

- 33.** A physical pendulum in the form of a planar body moves in simple harmonic motion with a frequency of 0.450 Hz. If the pendulum has a mass of 2.20 kg and the pivot is located 0.350 m from the center of mass, determine the moment of inertia of the pendulum.
- 34.** A very light, rigid rod with a length of 0.500 m extends straight out from one end of a meter stick. The stick is suspended from a pivot at the far end of the rod and is set into oscillation. (a) Determine the period of oscillation. (b) By what percentage does this differ from a 1.00-m-long simple pendulum?
- 35.** Consider the physical pendulum of Figure 13.13. (a) If I_{CM} is its moment of inertia about an axis that passes through its center of mass and is parallel to the axis that passes through its pivot point, show that its period is

$$T = 2\pi \sqrt{\frac{I_{\text{CM}} + md^2}{mgd}}$$

where d is the distance between the pivot point and the center of mass. (b) Show that the period has a minimum value when d satisfies $md^2 = I_{\text{CM}}$.

- 36.** A torsional pendulum is formed by attaching a wire to the center of a meter stick with a mass of 2.00 kg. If the resulting period is 3.00 min, what is the torsion constant for the wire?
- 37.** A clock balance wheel has a period of oscillation of 0.250 s. The wheel is constructed so that 20.0 g of mass is concentrated around a rim of radius 0.500 cm. What are (a) the wheel's moment of inertia and (b) the torsion constant of the attached spring?

Section 13.5 Comparing Simple Harmonic Motion with Uniform Circular Motion

- 38.** While riding behind a car that is traveling at 3.00 m/s, you notice that one of the car's tires has a small hemispherical boss on its rim, as shown in Figure P13.38. (a) Explain why the boss, from your viewpoint behind the car, executes simple harmonic motion. (b) If the radius of the car's tires is 0.300 m, what is the boss's period of oscillation?
- 39.** Consider the simplified single-piston engine shown in Figure P13.39. If the wheel rotates with constant angular speed, explain why the piston rod oscillates in simple harmonic motion.




Figure P13.38

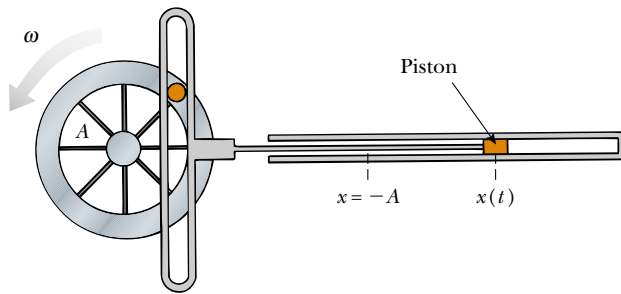


Figure P13.39

(Optional)

Section 13.6 Damped Oscillations

40. Show that the time rate of change of mechanical energy for a damped, undriven oscillator is given by $dE/dt = -bv^2$ and hence is always negative. (Hint: Differentiate the expression for the mechanical energy of an oscillator, $E = \frac{1}{2}mv^2 + \frac{1}{2}kx^2$, and use Eq. 13.32.)
41. A pendulum with a length of 1.00 m is released from an initial angle of 15.0° . After 1 000 s, its amplitude is reduced by friction to 5.50° . What is the value of $b/2m$?
42. Show that Equation 13.33 is a solution of Equation 13.32 provided that $b^2 < 4mk$.

(Optional)

Section 13.7 Forced Oscillations

43. A baby rejoices in the day by crawling and jumping up and down in her crib. Her mass is 12.5 kg, and the crib mattress can be modeled as a light spring with a force constant of 4.30 kN/m. (a) The baby soon learns to bounce with maximum amplitude and minimum effort by bending her knees at what frequency? (b) She learns to use the mattress as a trampoline—losing contact with it for part of each cycle—when her amplitude exceeds what value?
44. A 2.00-kg mass attached to a spring is driven by an external force $F = (3.00 \text{ N}) \cos(2\pi t)$. If the force constant of the spring is 20.0 N/m, determine (a) the pe-

riod and (b) the amplitude of the motion. (Hint: Assume that there is no damping—that is, that $b = 0$ —and use Eq. 13.37.)

45. Considering an *undamped*, forced oscillator ($b = 0$), show that Equation 13.36 is a solution of Equation 13.35, with an amplitude given by Equation 13.37.
46. A weight of 40.0 N is suspended from a spring that has a force constant of 200 N/m. The system is undamped and is subjected to a harmonic force with a frequency of 10.0 Hz, which results in a forced-motion amplitude of 2.00 cm. Determine the maximum value of the force.
47. Damping is negligible for a 0.150-kg mass hanging from a light 6.30-N/m spring. The system is driven by a force oscillating with an amplitude of 1.70 N. At what frequency will the force make the mass vibrate with an amplitude of 0.440 m?
48. You are a research biologist. Before dining at a fine restaurant, you set your pager to vibrate instead of beep, and you place it in the side pocket of your suit coat. The arm of your chair presses the light cloth against your body at one spot. Fabric with a length of 8.21 cm hangs freely below that spot, with the pager at the bottom. A co-worker telephones you. The motion of the vibrating pager makes the hanging part of your coat swing back and forth with remarkably large amplitude. The waiter, maître d', wine steward, and nearby diners notice immediately and fall silent. Your daughter pipes up and says, "Daddy, look! Your cockroaches must have gotten out again!" Find the frequency at which your pager vibrates.

ADDITIONAL PROBLEMS

49. A car with bad shock absorbers bounces up and down with a period of 1.50 s after hitting a bump. The car has a mass of 1 500 kg and is supported by four springs of equal force constant k . Determine the value of k .
50. A large passenger with a mass of 150 kg sits in the middle of the car described in Problem 49. What is the new period of oscillation?
51. A compact mass M is attached to the end of a uniform rod, of equal mass M and length L , that is pivoted at the top (Fig. P13.51). (a) Determine the tensions in the rod




Figure P13.51

at the pivot and at the point P when the system is stationary. (b) Calculate the period of oscillation for small displacements from equilibrium, and determine this period for $L = 2.00$ m. (*Hint:* Assume that the mass at the end of the rod is a point mass, and use Eq. 13.28.)

52. A mass, $m_1 = 9.00$ kg, is in equilibrium while connected to a light spring of constant $k = 100$ N/m that is fastened to a wall, as shown in Figure P13.52a. A second mass, $m_2 = 7.00$ kg, is slowly pushed up against mass m_1 , compressing the spring by the amount $A = 0.200$ m (see Fig. P13.52b). The system is then released, and both masses start moving to the right on the frictionless surface. (a) When m_1 reaches the equilibrium point, m_2 loses contact with m_1 (see Fig. P13.52c) and moves to the right with speed v . Determine the value of v . (b) How far apart are the masses when the spring is fully stretched for the first time (D in Fig. P13.52d)? (*Hint:* First determine the period of oscillation and the amplitude of the m_1 -spring system after m_2 loses contact with m_1 .)

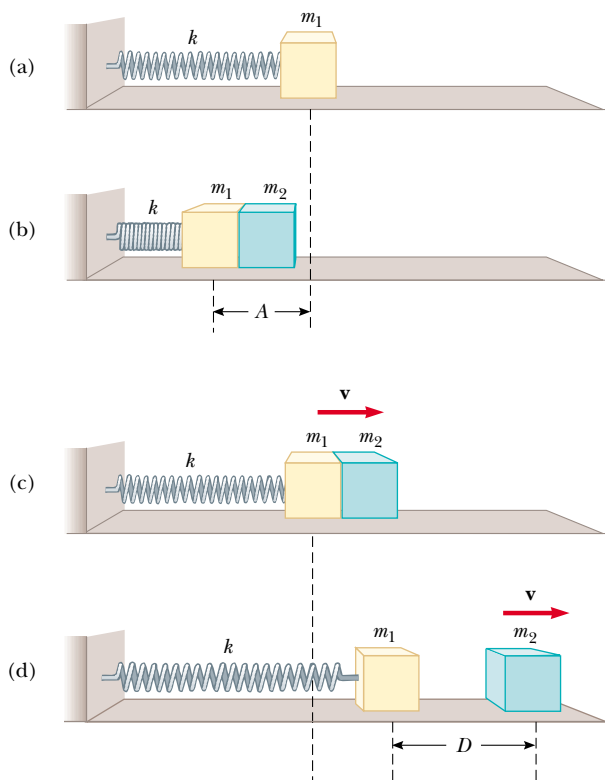


Figure P13.52

53. A large block P executes horizontal simple harmonic motion as it slides across a frictionless surface with a frequency of $f = 1.50$ Hz. Block B rests on it, as shown

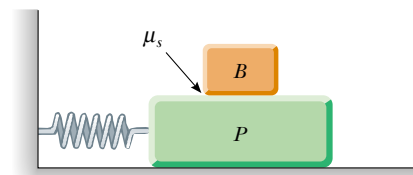


Figure P13.53 Problems 53 and 54.

in Figure P13.53, and the coefficient of static friction between the two is $\mu_s = 0.600$. What maximum amplitude of oscillation can the system have if block B is not to slip?

54. A large block P executes horizontal simple harmonic motion as it slides across a frictionless surface with a frequency f . Block B rests on it, as shown in Figure P13.53, and the coefficient of static friction between the two is μ_s . What maximum amplitude of oscillation can the system have if the upper block is not to slip?
55. The mass of the deuterium molecule (D_2) is twice that of the hydrogen molecule (H_2). If the vibrational frequency of H_2 is 1.30×10^{14} Hz, what is the vibrational frequency of D_2 ? Assume that the “spring constant” of attracting forces is the same for the two molecules.
56. A solid sphere (radius = R) rolls without slipping in a cylindrical trough (radius = $5R$), as shown in Figure P13.56. Show that, for small displacements from equilibrium perpendicular to the length of the trough, the sphere executes simple harmonic motion with a period $T = 2\pi\sqrt{28R/5g}$.




Figure P13.56

57. A light cubical container of volume a^3 is initially filled with a liquid of mass density ρ . The container is initially supported by a light string to form a pendulum of length L_i , measured from the center of mass of the filled container. The liquid is allowed to flow from the bottom of the container at a constant rate (dM/dt). At any time t , the level of the liquid in the container is h

and the length of the pendulum is L (measured relative to the instantaneous center of mass). (a) Sketch the apparatus and label the dimensions a , h , L , and L_i . (b) Find the time rate of change of the period as a function of time t . (c) Find the period as a function of time.

58. After a thrilling plunge, bungee-jumpers bounce freely on the bungee cords through many cycles. Your little brother can make a pest of himself by figuring out the mass of each person, using a proportion he set up by solving this problem: A mass m is oscillating freely on a vertical spring with a period T (Fig. P13.58a). An unknown mass m' on the same spring oscillates with a period T' . Determine (a) the spring constant k and (b) the unknown mass m' .

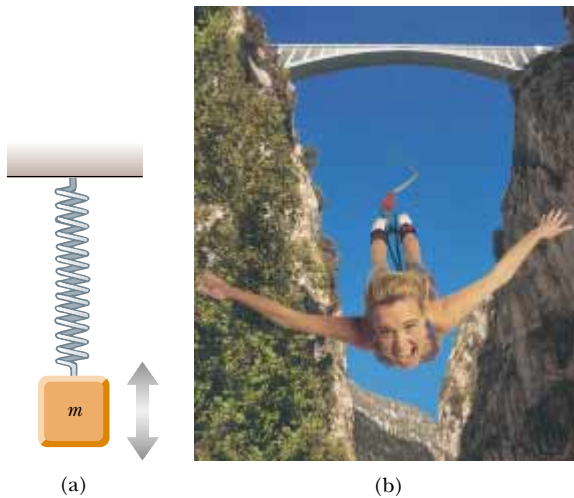


Figure P13.58 (a) Mass–spring system for Problems 58 and 68. (b) Bungee-jumping from a bridge. (*Telegraph Colour Library/EPG International*)

59. A pendulum of length L and mass M has a spring of force constant k connected to it at a distance h below its point of suspension (Fig. P13.59). Find the frequency of vibration of the system for small values of the amplitude (small θ). (Assume that the vertical suspension of length L is rigid, but neglect its mass.)
60. A horizontal plank of mass m and length L is pivoted at one end. The plank's other end is supported by a spring of force constant k (Fig. P13.60). The moment of inertia of the plank about the pivot is $\frac{1}{3} mL^2$. (a) Show that the plank, after being displaced a small angle θ from its horizontal equilibrium position and released, moves with simple harmonic motion of angular frequency $\omega = \sqrt{3k/m}$. (b) Evaluate the frequency if the mass is 5.00 kg and the spring has a force constant of 100 N/m.

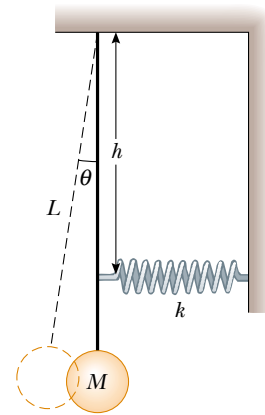


Figure P13.59

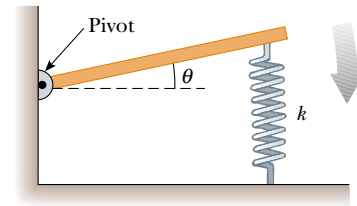


Figure P13.60

61. One end of a light spring with a force constant of 100 N/m is attached to a vertical wall. A light string is tied to the other end of the horizontal spring. The string changes from horizontal to vertical as it passes over a 4.00-cm-diameter solid pulley that is free to turn on a fixed smooth axle. The vertical section of the string supports a 200-g mass. The string does not slip at its contact with the pulley. Find the frequency of oscillation of the mass if the mass of the pulley is (a) negligible, (b) 250 g, and (c) 750 g.
62. A 2.00-kg block hangs without vibrating at the end of a spring ($k = 500$ N/m) that is attached to the ceiling of an elevator car. The car is rising with an upward acceleration of $g/3$ when the acceleration suddenly ceases (at $t = 0$). (a) What is the angular frequency of oscillation of the block after the acceleration ceases? (b) By what amount is the spring stretched during the acceleration of the elevator car? (c) What are the amplitude of the oscillation and the initial phase angle observed by a rider in the car? Take the upward direction to be positive.
63. A simple pendulum with a length of 2.23 m and a mass of 6.74 kg is given an initial speed of 2.06 m/s at its equilibrium position. Assume that it undergoes simple harmonic motion, and determine its (a) period, (b) total energy, and (c) maximum angular displacement.

64. People who ride motorcycles and bicycles learn to look out for bumps in the road and especially for *washboarding*, which is a condition of many equally spaced ridges worn into the road. What is so bad about washboarding? A motorcycle has several springs and shock absorbers in its suspension, but you can model it as a single spring supporting a mass. You can estimate the spring constant by thinking about how far the spring compresses when a big biker sits down on the seat. A motorcyclist traveling at highway speed must be particularly careful of washboard bumps that are a certain distance apart. What is the order of magnitude of their separation distance? State the quantities you take as data and the values you estimate or measure for them.
65. A wire is bent into the shape of one cycle of a cosine curve. It is held in a vertical plane so that the height y of the wire at any horizontal distance x from the center is given by $y = 20.0 \text{ cm}[1 - \cos(0.160x \text{ rad/m})]$. A bead can slide without friction on the stationary wire. Show that if its excursion away from $x = 0$ is never large, the bead moves with simple harmonic motion. Determine its angular frequency. (*Hint:* $\cos \theta \cong 1 - \theta^2/2$ for small θ .)
66. A block of mass M is connected to a spring of mass m and oscillates in simple harmonic motion on a horizontal, frictionless track (Fig. P13.66). The force constant of the spring is k , and the equilibrium length is ℓ . Find (a) the kinetic energy of the system when the block has a speed v , and (b) the period of oscillation. (*Hint:* Assume that all portions of the spring oscillate in phase and that the velocity of a segment dx is proportional to the distance x from the fixed end; that is, $v_x = [x/\ell]v$. Also, note that the mass of a segment of the spring is $dm = [m/\ell]dx$.)

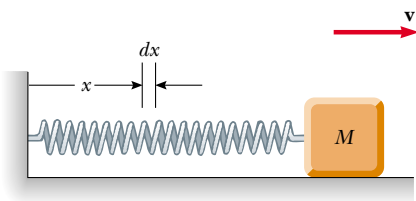


Figure P13.66




Figure P13.67

68. When a mass M , connected to the end of a spring of mass $m_s = 7.40 \text{ g}$ and force constant k , is set into simple harmonic motion, the period of its motion is

$$T = 2\pi\sqrt{\frac{M + (m_s/3)}{k}}$$

A two-part experiment is conducted with the use of various masses suspended vertically from the spring, as shown in Figure P13.58a. (a) Static extensions of 17.0, 29.3, 35.3, 41.3, 47.1, and 49.3 cm are measured for M values of 20.0, 40.0, 50.0, 60.0, 70.0, and 80.0 g, respectively. Construct a graph of Mg versus x , and perform a linear least-squares fit to the data. From the slope of your graph, determine a value for k for this spring.

(b) The system is now set into simple harmonic motion, and periods are measured with a stopwatch. With $M = 80.0 \text{ g}$, the total time for 10 oscillations is measured to be 13.41 s. The experiment is repeated with M values of 70.0, 60.0, 50.0, 40.0, and 20.0 g, with corresponding times for 10 oscillations of 12.52, 11.67, 10.67, 9.62, and 7.03 s. Compute the experimental value for T for each of these measurements. Plot a graph of T^2 versus M , and determine a value for k from the slope of the linear least-squares fit through the data points. Compare this value of k with that obtained in part (a). (c) Obtain a value for m_s from your graph, and compare it with the given value of 7.40 g.

69. A small, thin disk of radius r and mass m is attached rigidly to the face of a second thin disk of radius R and mass M , as shown in Figure P13.69. The center of the small disk is located at the edge of the large disk. The large disk is mounted at its center on a frictionless axle. The assembly is rotated through a small angle θ from its equilibrium position and released. (a) Show that the




Figure P13.69

- WEB 67. A ball of mass m is connected to two rubber bands of length L , each under tension T , as in Figure P13.67. The ball is displaced by a small distance y perpendicular to the length of the rubber bands. Assuming that the tension does not change, show that (a) the restoring force is $-(2T/L)y$ and (b) the system exhibits simple harmonic motion with an angular frequency $\omega = \sqrt{2T/mL}$.

speed of the center of the small disk as it passes through the equilibrium position is

$$v = 2 \left[\frac{Rg(1 - \cos \theta)}{(M/m) + (r/R)^2 + 2} \right]^{1/2}$$

(b) Show that the period of the motion is

$$T = 2\pi \left[\frac{(M + 2m)R^2 + mr^2}{2mgR} \right]^{1/2}$$

70. Consider the damped oscillator illustrated in Figure 13.19. Assume that the mass is 375 g, the spring constant is 100 N/m, and $b = 0.100$ kg/s. (a) How long does it take for the amplitude to drop to half its initial value? (b) How long does it take for the mechanical energy to drop to half its initial value? (c) Show that, in general, the fractional rate at which the amplitude decreases in a damped harmonic oscillator is one-half the fractional rate at which the mechanical energy decreases.

71. A mass m is connected to two springs of force constants k_1 and k_2 , as shown in Figure P13.71a and b. In each case, the mass moves on a frictionless table and is displaced from equilibrium and then released. Show that in the two cases the mass exhibits simple harmonic motion with periods

$$(a) \quad T = 2\pi \sqrt{\frac{m(k_1 + k_2)}{k_1 k_2}}$$

$$(b) \quad T = 2\pi \sqrt{\frac{m}{k_1 + k_2}}$$

72. Consider a simple pendulum of length $L = 1.20$ m that is displaced from the vertical by an angle θ_{\max} and then released. You are to predict the subsequent angular displacements when θ_{\max} is small and also when it is large. Set up and carry out a numerical method to integrate

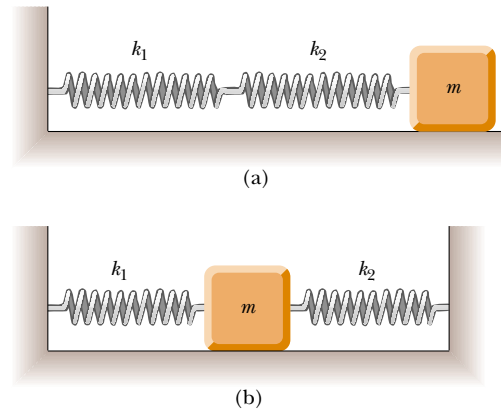


Figure P13.71

the equation of motion for the simple pendulum:

$$\frac{d^2\theta}{dt^2} = -\frac{g}{L} \sin \theta$$

Take the initial conditions to be $\theta = \theta_{\max}$ and $d\theta/dt = 0$ at $t = 0$. On one trial choose $\theta_{\max} = 5.00^\circ$, and on another trial take $\theta_{\max} = 100^\circ$. In each case, find the displacement θ as a function of time. Using the same values for θ_{\max} , compare your results for θ with those obtained from $\theta_{\max} \cos \omega t$. How does the period for the large value of θ_{\max} compare with that for the small value of θ_{\max} ? *Note:* Using the Euler method to solve this differential equation, you may find that the amplitude tends to increase with time. The fourth-order Runge–Kutta method would be a better choice to solve the differential equation. However, if you choose Δt small enough, the solution that you obtain using Euler's method can still be good.

ANSWERS TO QUICK QUIZZES

- 13.1 Because A can never be zero, ϕ must be any value that results in the cosine function's being zero at $t = 0$. In other words, $\phi = \cos^{-1}(0)$. This is true at $\phi = \pi/2$, $3\pi/2$ or, more generally, $\phi = \pm n\pi/2$, where n is any nonzero odd integer. If we want to restrict our choices of ϕ to values between 0 and 2π , we need to know whether the object was moving to the right or to the left at $t = 0$. If it was moving with a positive velocity, then $\phi = 3\pi/2$. If $v_i < 0$, then $\phi = \pi/2$.
- 13.2 (d) $4A$. From its maximum positive position to the equilibrium position, it travels a distance A , by definition of *amplitude*. It then goes an equal distance past the equilibrium position to its maximum negative position. It then repeats these two motions in the reverse direction to return to its original position and complete one cycle.

- 13.3 No, because in simple harmonic motion, the acceleration is not constant.
- 13.4 $x = -A \sin \omega t$, where $A = v_i/\omega$.
- 13.5 From Hooke's law, the spring constant must be $k = mg/L$. If we substitute this value for k into Equation 13.18, we find that

$$T = 2\pi \sqrt{\frac{m}{k}} = 2\pi \sqrt{\frac{m}{mg/L}} = 2\pi \sqrt{\frac{L}{g}}$$

This is the same as Equation 13.26, which gives the period of a simple pendulum. Thus, when an object stretches a vertically hung spring, the period of the system is the same as that of a simple pendulum having a length equal to the amount of static extension of the spring.

13.6 If your goal is simply to stop the bounce from an absorbed shock as rapidly as possible, you should critically damp the suspension. Unfortunately, the stiffness of this design makes for an uncomfortable ride. If you underdamp the suspension, the ride is more comfortable but the car bounces. If you overdamp the suspension, the wheel is displaced from its equilibrium position longer than it should be. (For example, after hitting a bump, the spring stays compressed for a short time and the

wheel does not quickly drop back down into contact with the road after the wheel is past the bump—a dangerous situation.) Because of all these considerations, automotive engineers usually design suspensions to be slightly underdamped. This allows the suspension to absorb a shock rapidly (minimizing the roughness of the ride) and then return to equilibrium after only one or two noticeable oscillations.