


Contact Quality

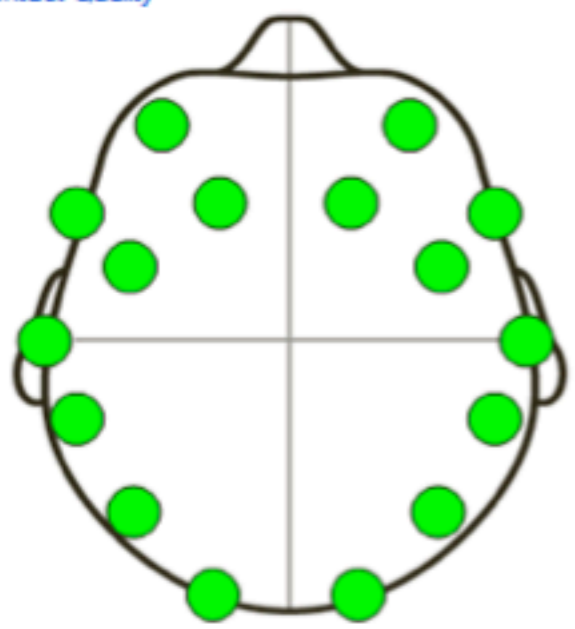

Sampling Rate: 128

Battery: [Empty field]

Marker

Serial Port: COM1 [Dropdown] [Refresh]

Configure Marker ...

Log Message:

```

Marker(2) is inserted
Marker(1) is inserted
Marker(2) is inserted
Marker(1) is inserted
Marker(2) is inserted
Marker(1) is inserted
Marker(2) is inserted
  
```

Clear

Save Data

Load Data

EEG FFT Gyro Data Packets

Channel Scaling: 200 uV

Max Amplitude: 4160 uV

Min Amplitude: 3960 uV

Auto Scale

High-Pass Filter

All Channels

AF3

F7

F3

FC5

T7

P7

O1

O2

P8

T8

FC6

F4

F8

AF4

